





1-800-367-1492 · www.cpcsigns.com














Cones & Cone Bars

Traffic Cones

- Flexible Bright Fluorescent Orange, Lime, Blue or White PVC

Some sizes require minimum quantity order, call for details.



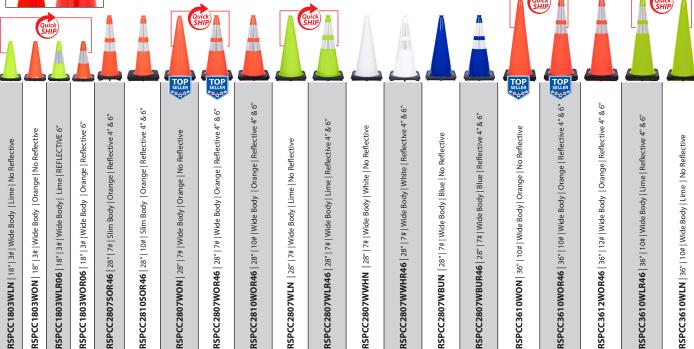



Cone Bars provide an **Instant Barrier in Seconds!!**

RSPCCZCB6OW - Orange/White RSPCCZCB6YB - Yellow/Black




- **Engineer Grade Reflective**
- Made from ABS Plastic and are reusable
- Use on Cones and Knob-top Delineators
- Extends from 3.8'-6'
- Ultra lightweight 1.35 lbs.

LoPro Airport Barricades • Barricade Sheeting Rolls

LoPro Airport Barricades

- A Low-profile, 8' long x 10" high, interlocking barricade system used to close taxiways, runways, and delineate construction areas.
- Durable construction, connectors are molded into the barricade, no pins to lose
- Accepts two styles of warning lights and has (2) two flag mounts.
- Stackable for transportation and storage
- FAA Advisory Circular No. 150/5370-2F compliant





RSPBE1PLPA096H Standard Lights and Flags SOLD Separately



- Engineer Grade (E) in 6" or 8" widths
- High Intensity Prismatic (H) in 8" wide
- Diamond Grade Cube (3) in 7.75" wide
- Specify 4" (4) or 6" (6) stripe and right (R) or left (L) slant where appropriate

50 Yard Roll Part #	Width & Type	Stripe Width	Colors
RSHCN8117(L)60650	6" (E)	6"	O/W
RSHCN8117(L)40850	8" (E)	4"	O/W
RSH446(L)077550	7.75" (3)	6"	O/W
RSHCN8117(L)60850SC	8" (E)	6"	O/W
RSH3334(L)0850	8" (H)	4"	O/W
RSH3336(L)0850	8" (H)	6"	O/W
RSHCN8115(L)60850SC	8" (E)	6"	R/W
RSHCN515(L)60850	8" (H)	6"	R/W



RSPCC42PWOH46 Standard

Watchtower Cone

- 42" tall (46.25" with handle)
- Stack up to 20% more on your truck with new compact nesting design.
- Strong, ergonomic handle speeds placement on job, as it fits two hands which makes lifting with base easier. Also, it's easy to string caution tape through handles.
- Recessed area protects sheeting.
- Accepts same bases as our Navicade™ delineator which can reduce your base inventory. 10, 16, or 30 lb. recycled rubber bases available.
- Customize with your company name or logo
- MASH Passed, Meets MUTCD Standards


Specifications	Standard	Additional Options Available
Body Color Orange		NONE
Stripe Width	1 each of 4" & 6" HIP	2 each 4" White & 4" Orange -or- 2 each 4" White
Stripe Color White		Alternating Orange & White
Reflectivity	HIP	NONE -or- DG
Base	16 lbs Rubber	10 lbs. or 30 lbs.



RSPCV08366ORE Standard



- Oversized handle with comfort grip
- Designed to withstand repeated impacts with minimal damage to vehicles or unit
- Recessed panel protects reflective sheeting, 8" W x 34" H, OR 8" W x 36" H
- Flashing light mounting receptacle
- Available in orange and white
- Solid recycled rubber bases two sizes: 20 lbs. and 30 lbs.



- Size: 15.4" W x 45" H | Weight: 4 lbs.
- MASH Passed and Meets MUTCD Standards



RSPCVZBASE20 20 lb. base

RSPCVZBASE30

30 lb base



The handle is easy to grab even with the light attached



Sidewall design adds strength and durability

Specifications	Standard	Additional Options Available
Color	Orange	White
Reflective Area	8" x 36"	8" x 34"
Stripe Size	6" for 8" x 36"	6" for 8" x 34"
Reflectivity	ENG	HIP -or- DG
Base	20 lbs	30 lbs
Stencil	NONE	Name or Logo on Plastic Panel or Molded into Base



Open Top Delineator

- Quick and easy set-up
- Reflective Bands, 2 each 3" or 4" wide
- Flange on bottom grabs base for tight fit, 5.375" diameter
- Post Diameter: 4"
- Recycled rubber bases: 8 lbs, 10 lbs, 12 lbs, and 18 lbs
- 2 Sizes: 42" H weight 1.7 lbs 28" H - weight 1.1 lbs
- MASH Passed and Meets MUTCD Standards

0
Available Bases
PSDCTD7R(YY)

(08) 8 lbs | (10) 10 lbs (12) 12 lbs | (18) 18 lbs

Specifications	Standard	Additional Options Available
Height/Weight	42" /1.7 lbs	28" / 1.1 lbs
Reflectivity	ENG	NONE -or- HIP -or- DG
Band (Stripe Width)	2 each - 3"	2 each - 4"
Base	8 lbs	10 lbs, 12 lbs, 18 lbs
Handle	NONE	Upgrade to the Knob-Top Delineator



Colored A-Top Delineators

RSPCTJA46HN(XX) Body Colors (XX): Black (BK) | Blue (BU) | Hunter Green (GR) Lime (LI) | Orange (OR) | Red (RE) | White (WH) | Yellow (YE)

- The A-Top Delineator has replaced the discontinued Dome-Top.
- Perfect for hotels, schools, churches, parking lots, valet parking and more! Beautiful rich color options make the uses for these delineators endless.
- New arch design for easy setup and take down. When used in conjunction with the JBC Cone Bar or the JBC Cobra Chain, you can create a barrier in seconds.
- Made of a special LDPE formula, these Delineators are strong where you need them to be and flexible enough to bounce back from tough impacts. Tubes have UV stabilizers to ensure they hold their color in the harshest conditions with recessed area to protect 3M Prismatic Reflective Sheeting. Strong consistent lip at base to ensure snug fit with the base.
- Recycled rubber bases: 8 lbs or 12 lbs, SOLD separately.
- Bases are re-vulcanized rubber and have a nice clean look.

Specifications	Quick SHIP	Additional Options Available
Height	46"	46"
Reflectivity	HIP	NONE -or- ENG -or- DG
Band (Stripe Width)	2 Each - 3"	NONE
Rubber Base	8 lbs	12 lbs
Color	Black and Lime	Red, Yellow, Blue, White, Hunter Green, Orange

Barrier Tapes






- 3 mil: 3" x 1000' poly barrier tape provides warning of temporary safety hazard
- Economical, strong, and disposable
- Legends (X):
 - (A) Caution Caution
 - (B) Police Line Do Not Cross
 - (F) Caution Do Not Enter
- Other sizes and legends available

Channelizers

Knob-Top 4" Delineator





- Accepts cone bars
- Caution tape wraps around knob
- Support rings around reflective bands for added tape protection
- Made from low density polyethylene Fluorescent Orange plastic
- 8 lb. base is standard and included in price, other sizes available upon request.










- Plasticade Navicade Brand
- High Density Polyethylene
- 4 6" Tall High Intensity Orange and White Reflective stripes
- 3 lbs. / 49.25" H x 7.6" W
- 16 lb. Recycled rubber base included in 6" HIP version.



- Stackable with or without base for easy transportation or storage
- Molded-in holes for mounting lights and signs
- MASH Passed and meets MUTCD Standards

Specifications	Standard	Additional Options Available
Stripe Width	4 Each - 6"	4 Each - 4" -or- 1 Each - 4" and 6"
Reflectivity	HIP	DG -or- DG/HIP Combo -or- ENG
Base	16 lbs.	30 lbs.
Stencil	NONE	Name or Logo Molded into Base







RSPCD100ZBTIRE - 25lbs

gentle slope of dome merges with handle

New Light Mounting Design: light easily turns for stacking





RSPCC42NH4616

16 lb base



- Available in High and Low Density Polyethylene
- Five Tier Design with (2) 6" Tall Orange and (2) 6" Tall White High Intensity Reflective Stripes
- 8 lbs. | 39.7" H x 23.5" W
- MASH Passed and meets MUTCD Standards

Specifications	Standard	Additional Options Available	
Stripe Width	(2) 6" Orange (2) 6" White	(2) 4" Orange (2) 4" White	
Reflectivity HIP		DG -or- ENG	
Density	HIGH	LOW	
Base 25# Recycled Rubber Tire Ring		Also available in version compatible with Snap On Rubber Base	
Stencil	NONE	Molded in Name or Logo	

50%

STRONGER

PLASTIC

BOARDS



CONSTRUCTION WORK ZONE

Type I & II Barricades





TYPE II - Standard RSPB1PMPC2WHE0808

Combocade[™] Type I and Type II Barricade

- Steel leg barricade with your choice of plastic or plywood boards
- Boards and legs can be replaced, legs can be repaired
- 45" steel legs, 14 gauge thickness, galvanized white powder coated finish available by special order
- Plastic boards are strong and dense, will not bend, warp, crack, splinter, or peel
- Bolt holes are molded into the plastic boards
- Dimensions: 24.4" W x 42.6" H | Board Sizes Available: 8" x 24" and 12" x 24"
- MASH Passed and meets MUTCD Standards



	_	
Specifications	Standard	Additional Options Available
Reflectivity	ENG	HIP -or- DG
Reflective Area Type I Barricade	8" x 24" Top Panel	12" x 24" Top Panel
Reflective Area Type II Barricade	8" x 24" Top Panel 8" x 24" Bottom Panel	12" x 24" Top Panel 8" x 24" Bottom Panel
Usage	Type I or Type II Barricade	Safety Signage
Stencil	NONE	Recommended for Type I Only
Purchase Option	Complete Barricade	Replacement Parts



Purchase barricades fully assembled or as component parts.


> Names can be stenciled on blank panels for identification.

> > Leg hinge hole accepts 1/2" light mounting bolt

Econocade® Type I and Type II Barricade







- Rust free and impact resistant.
- Bottom rail can carry a sand bag.
- Two flashing light receptacles

meets MUTCD Standards

MASH Passed and

White in Stock. Also available in Orange, Yellow, Red, Blue and Green.





RSPB1PPPE1WHH08



The Econocade Barricade can be purchased in a variety of colors.

	Specifications	Standard	Additional Options Available
Body Color		White	500 Piece Minimum: Orange, Red, Yellow, Green or Blue
	Reflectivity	HIP	ENG -or- DG
	Reflective Area Type I Barricade	8" x 24" Top Panel	12" x 24" Top Panel
	Reflective Area Type II Barricade 8" x 24" Top Panel 8" x 24" Bottom Panel		12" x 24" Top Panel 8" x 24" Bottom Panel
	Usage Type I or Type II Barricade		Safety Signage
	Stencil	NONE	Recommended for Type I Only

Plasticade® Type I and Type II Barricade

- Premium Plasticade Barricade
- Withstands repeated impacts
- Molded-in handles with mounting holes for attaching flashing lights
- "Click lock" hinges for a positive interlock in the open position
- Internal ballasting, up to 10 lbs. of sand
- Sandbag bar (for additional weight)
- White in Stock. Also available in Orange and Yellow.
- All grades of reflective sheeting available.
- Stacking lugs keep units from sliding when stacked
- MASH Passed and meets MUTCD Standards



RSPB1PPPL2WHH08

Add a Sign Sleeve to use as a sign stand



Stenciling Available



RSPB1PPPL1WHH08 TYPF I



RSPB1PPPL2WHH12 TYPF II

Specifications	Standard	Additional Options Available
Body Color	White -or- Orange	Yellow
Reflectivity	HIP	ENG -or- DG
Reflective Area Type I Barricade	8" x 24" Top Panel	12" x 24" Top Panel
Reflective Area 8" x 24" Top Panel Type II Barricade 8" x 24" Bottom Panel		12" x 24" Top Panel 8" x 24" Bottom Panel
Usage	Type I or Type II Barricade	Sign Stand with Sign Sleeve Option -or- Safety Signage
Stencil	NONE	Recommended for Type I Only

Omni™ A-Frame Type I Barricade Kits

All kits contain (2) Omni™ A-Frame Legs and (1) 1" x 8" x 8' High Intensity Reflective Barricade Board

Reflective Sides	Stripe Direction	TYPE I KIT CODES
Double-Sided	Left/Right	RSPBAPABK10996HD
Single-Sided	Left	RSPBAPABK10996HL
Single-Sided	Right	RSPBAPABK10996HR

Omni™ A-Frame Type II Barricade Kits

All kits contain (2) Omni™ A-Frame Legs and (2) 1" x 8" x 8' High Intensity Reflective Barricade Boards


Reflective Sides	Stripe Direction	TYPE II KIT CODES
Double-Sided	Left/Right	RSPBAPABK20996HD
Single-Sided	Left	RSPBAPABK20996HL
Single-Sided	Right	RSPBAPABK20996HR

Omni™ A-Frame Leg CODE: RSPBAPA200 Leg Sold Individually Build a Custom Kit with Omni A-Frame Legs and 1" x 8" Barricade Boards of your choice, see page 83.

Reflective barricade boards using your town, school or team colors, available by custom order.

Omni™ A-Frame Type I & II Barricades





Omni[™] A-Frame Leg accepts Plasticade[©] 1" x 8" Barricade Boards as the standard option, as well as, I-Beam Boards.



- Omni™ A-Frame legs are 20% heavier than the Plasticade[©] A-Frame barricade leg with a solid wall design.
- Omni™ A-Frame legs have stacking lugs for easy transportation and storage and a flashing light mounting receptacle.
- I-Beam Type I and II Barricade Kits are also available at www.cpcsigns.com



Telespar® Welded Riser Breakaway System Kits



Kit #1 Welded Riser Design



- Kit Code: RSPB3ZBUS1
- (2) Two 5' Telespar® Feet with 6" Welded Risers
- (2) Two 5' Telespar® Uprights
- (1) One Hardware Kit -Board to Square Post Upright

Kit #2 Welded Riser Design with Quick Release Pins



- Kit Code: RSPB3ZBUS1QR
- (2) Two 5'Telespar® Feet with 6" Welded Risers
- (2) Two 5'Telespar® Uprights
- (1) One Hardware Kit Board to Square Post Upright
- (2) Quick Release Pins
- Breakaway System Kits allow quick removal of uprights from feet or bases for short term or permanent placement. Barricade Boards, Sold Separately on page 83.
- These kits are easy to assemble and replace parts, if necessary.
- The Telespar® Square Posts shape provides superior wind load capabilities and inhibits warping. Galvanized, hot rolled high carbon steel. Pre-punched mounting 7/16" holes. Upright accepts a flashing barricade light.

Volcano Rubber Base Breakaway System Kits



Kit #3 Volcano Base & Telespar® Posts

- Kit Code: RSPB3ZBUS2S
- (2) Two Volcano Bases
- ♦ (2) Two 5' Telespar® Uprights
- (1) One Hardware Kit -Board to Square Post Upright
- (2) Quick Release Pins


- Breakaway System Kits allow quick removal of uprights from feet or bases for short term or permanent placement.
 Barricade Boards, Sold Separately on page 83.
- These kits are easy to assemble and replace parts, if necessary.
- The Telespar® Square Posts shape provides superior wind load capabilities and inhibits warping. Galvanized, hot rolled high carbon steel. Pre-punched mounting 7/16" holes. Upright accepts a flashing barricade light.
- Volcano Bases are a durable, thick recycled rubber base with steel insert for square post attachment.
- Power Posts are lightweight and impact resistant square plastic posts that will never rust. Posts have universal pre-drilled mounting holes for Type III boards and flashing barricade lights.



Kit #4 Volcano Base & Power Posts

- ♦ Kit Code: RSPB3ZBUS2P
- (2) Two Volcano Bases
- (2) Two 5' 3" Power Post® Uprights
- (1) One Hardware Kit Board to Square Post Upright
- (2) Quick Release Pins

Plasticade® Breakaway



 Available with 5 board lengths: 1" x 8" boards, 4', 6', 8', 10' or 12' long

 Easier to transport, install, and store than wood or steel Type III Barricades

Accepts two flashing lights

Boards are available sheeted 1
 (one or both sides) or unsheeted

 Barricades are sold in kits with hardware included or as component parts

◆ MASH Passed and meets MUTCD Standards €





Sentinel™

- Easy to assemble base consists of 2 pieces, upright and base, that snap together, no hardware required.
- Available with two board lengths: 1" x 8" boards, 4' or 6' long
- Boards can be purchased sheeted (on one or both sides) or unsheeted
- Base can be internally ballasted with sand, sandbags, or water in warmer climates
- MASH Passed and meets MUTCD Standards



Type III Barricade Components

Barricade Tape, see page 78.


Components & Accessories



Angle Iron/Telespar® Kits

The below components are also available as Kits. Kits include

three barricade boards of your choice plus all the hardware needed for assembly.





Telespar Foot 2" 14 Gauge w/6" Riser **RSPB3ZBUZTF**



Plasticade Volcano Rubber Base for 1.75" square post RSPB3ZBUZRV



RSPB3ZBUZPPU
63" H | 1.75" tube
Telespar® Uprights
RSPB3ZBUZTU60
60" H | 1.75" tube | 14 Gauge

Plasticade Power Posts

Crossmember Stabilizer Bar

Stabilizer Bar 1.75"/14 gauge for 8' Type III RSPB3ZBUZTC70



T-Bracket RSPB3ZBUZTCHTB

Hardware Kit for T-Bracket and Crossmember RSPB3ZBUZTCHTBH



Quick Release Pin - 2" RSPB3ZBUZTFHORP2



Board to Square Post Upright **Hardware Kit RSPB3ZBUZSPUH**



Angle Iron Upright

required per barricade

☐ SCAN QR codes with Smart Phone
T. camera to view Stripes videos.

RSPB3ZBUZAIF

About Stripes

"LEFT" Stripes begin at the upper left side

Orange - Temporary Traffic Control
Red - STOP or Prohibition (Permanent)

and slope downward to the lower right.

"RIGHT" Stripes begin at the upper right side and slope downward to the lower left.

RSPB3Z(XXX)S(X)M(S/D)(L/R)(OW/RW)6

- 1" thick x 8" wide plastic boards: extruded hollow core with internal walls for strength and durability.
- Length (XXX): (048) 4' | (072) 6' | (096) 8' (120) 10' | (144) 12'
- Sheeting (X): (H) High Intensity
 - (E) Engineer Grade
 - (D) Diamond Grade Sheeting
- ♦ Sides (S/D): (S) Single or (D) Double
- Stripe Direction (L/R): Right (R) or Left (L) or omit if (D) Double-Sided
- Colors (OW/RW): (OW) Orange/White (RW) Red/White - not available in Diamond Grade

Barricade Boards

Sold separately from Breakaway Kits #1-4



Barricade Board Quick		
Length	8′ (96")	
Reflective Sides	1 - Single Sided HIP	
Reflectivity		
Stripe Direction	6" Left or Right Stripe	
Stripe Color	Orange & White	
Stencil	NONE	

Color Matched Pedestrian and Crowd Control Boards





- Reflective barricade boards using your town, school or team colors, available by custom order.
- Examples of color combinations shown. Request your specific colors when ordering.
- Barricade components including feet, bases, uprights and hardware, sold separately from barricade boards.







Construction Work Zone Signs CWZ

be ordered with 500 ft 1000 ft (1500 ft (1/2 mile 1 mile Ahead 00 FT (Blank Space) Example: S4848W202(AH)(X)AC

Huge Selection IN STOCK READY TO SHIP SIGNS **DETOUR** AHEAD

S3030W202(XX)(X)AC S3636W202(XX)(X)AC S4848W202(XX)(X)AC

ROAD WORK AHEAD

S3030W201(XX)(X)AC S3636W201(XX)(X)AC \$4848W201(XX)(X)AC

ROAD **CLOSED AHEAD**

S3030W203(XX)(X)AC S3636W203(XX)(X)AC S4848W203(XX)(X)AC

UTILITY

WORK

AHEAD

S3030W217(XX)(X)AC

S3636W217(XX)(X)AC

\$4848W217(XX)(X)AC

S3030W204(XX)(X)AC S3636W204(XX)(X)AC S4848W204(XX)(X)AC

> LEFT LANES **CLOSED** 2 MILE

ONE LANE

ROAD

AHEAD

S3030W205AL(XX)(X)AC S3636W205AL(XX)(X)AC \$4848W205AL(XX)(X)AC

EFT LANE **CLOSED AHEAD**

S3030W205L(XX)(X)AC S3636W205L(XX)(X)AC

S4848W205L(XX)(X)AC

RIGHT LANES

2 MILE

S3030W205AR(XX)(X)AC

S3636W205AR(XX)(X)AC

\$4848W205AR(XX)(X)AC

S3030W205R(XX)(X)AC S3636W205R(XX)(X)AC S4848W205R(XX)(X)AC

SHOULDER

CLOSED

1000F

S3030W215BL(XX)(X)AC

S3636W215BL(XX)(X)AC

S4848W215BL(XX)(X)AC

RIGHT LANE

CLOSED

AHEAD

S3030W213(XX)(X)AC S3636W213(XX)(X)AC S4848W213(XX)(X)AC

ROAD

MACHINERY

AHEAD

RIGHT SHOULDER CLOSED 1000F

> S3030W215BR(XX)(X)AC S3636W215BR(XX)(X)AC \$4848W215BR(XX)(X)AC

*Call customer service for current availability. 48" Signs Must Ship Truck Line.



Reverse Curve Left S4848W14L(X)AC



Reverse Curve Right \$4848W14R(X)AC



Merge Left S4848W41L(D)AC



Merge Right S4848W41R(D)AC



Lane Reduction Left S4848W42L(X)AC



Lane Reduction Double S4848W42D(X)AC



Lane Reduction Right S4848W42R(X)AC



S4836W143(X)AC



Flagger Symbol \$3030W207(X)AC S3636W207(X)AC S4848W207(X)AC



SLSZNONW207B4848(X)AC



S3030W34(X)AC \$3636W34(X)AC S4848W34(X)AC



Men Working Symbol \$3030W211(X)AC S3636W211(X)AC S4848W211(X)AC



S3030W811(X)AC \$3636W811(X)AC S4848W811(X)AC



S3030W812(X)AC \$3636W812(X)AC S4848W812(X)AC



S3030W93(X)AC \$3636W93(X)AC S4848W93(X)AC



S3030W215(X)AC \$3636W215(X)AC S4848W215(X)AC



S2424W211B(X)AC S3030W211B(X)AC S3636W211B(X)AC S4848W211B(X)AC



S3030W211C(X)AC S3636W211C(X)AC S4848W211C(X)AC



S3030W212(X)AC S3636W212(X)AC S4848W212(X)AC



S3030W212T(X)AC S3636W212T(X)AC S4848W212T(X)AC



S3030W215AL(X)AC S3636W215AL(X)AC S4848W215AL(X)AC



S3030W215AR(X)AC S3636W215AR(X)AC S4848W215AR(X)AC



S3030W216(X)AC S3636W216(X)AC S4848W216(X)AC



S3030W221(X)AC S3636W221(X)AC S4848W221(X)AC



S3030W241(L)(X)AC S3636W241(L)(X)AC \$4848W241(L)(X)AC



S3030W241A(R)(X)AC \$3636W241A(R)(X)AC \$4848W241A(R)(X)AC



\$3636W241B(R)(X)AC \$4848W241B(R)(X)AC



S1818W131P10(X)AC S2424W131P10(X)AC



S1818W131P15(X)AC S2424W131P15(X)AC



S1818W131P20(X)AC S2424W131P20(X)AC



S1818W131P25(X)AC S2424W131P25(X)AC



S2424W131P40(X)AC



\$1818W131P45(X)AC S2424W131P45(X)AC



Replacement Requirements*

Work Zone signs should only be used in "new" or "like new" condition and replaced immediately if missing, damaged or deteriorated. While they are temporary signs, condition is extremely critical because travel

through work zones can be hazardous with unexpected or unusual conditions.

*Maintenance of Signs and Sign Support: FHWA-SA-09-025

Are Your Signs Bright Enough?

All Ground Mounted Warning Signs MUST be Type II Reflective or better. All Roll-Up Signs used at night MUST be retro-reflective. To stay in compliance with the MUTCD, we recommend using:

Fluorescent Orange VIP or Orange HIP for all Work Zone Signs for the best overall value and warranty included.







\$1818W131P30(X)AC S2424W131P30(X)AC 2025 | Catalog#18

\$1818W131P35(X)AC S2424W131P35(X)AC

\$1818W131P40(X)AC

Substrates (S):

(M3) ACM (radius corners & holes) (A) .080" Aluminum (radius corners & holes) (C04) 4MM Coroplast (straight corners) (C10) 10MM Coroplast (straight corners)

> Reflective Sheeting (X): (3) DG3 Diamond Grade Cubed (D) VIP Diamond Grade (H) High Intensity Prismatic

- ACM and Coroplast Signs are crashworthy when mounted on a Type III Barricade.
- Popular legends shown, available in all 4 substrates. Call customer service for custom legend signs (CLS).

ROAD CLOSED

S4830R112(X)(S)

BRIDGE CLOSED

S4830R112R(X)(S)

LANE

CLOSED

S4830R112L(X)(S)

AHEAD LOCAL TRAFFIC ONLY S6030R113CM(X)(S)

ROAD CLOSED

AHEAD

LOCAL TRAFFIC ONLY

S6030R113AM(X)(S)

BRIDGE CLOSED

STREET CLOSED

S4830R112S(X)(S)

ROAD CLOSED XX MILES AHEAD LOCAL TRAFFIC ONLY

S6030R113AB(XX)(H)A

BRIDGE OUT XX MILES AHEAD LOCAL TRAFFIC ONLY

S6030R113B(XX)(H)A

SIDEWALK

CLOSED

S2412R99(X)(S)

DETOUR

S3024M49U(X)(S)C

DETOUR

ROAD CLOSED THRU TRAFFIC

S6030R114(X)(S)



S4830R112C(X)(S)



S1824W18(X)(S)C S2430W18(X)(S)C



S3618W17(X)(S)C S4824W17(X)(S)C



S2412R911A(L/R)(X)(S) S2412R910A(L/R)(X)(S)



S4824W16(X)(S)C

Aluminum



S4818M410(L)(X)(S)C



S3618G202(X)(S)C S4824G202(X)(S)C **DETOUR**

S2412M48(X)(S)C



S2412M48B(X)(S)C

ROAD WORK **NEXT 5 MILES**

S3618G201B(X)(S)C S4824G201B(X)(S)C *Specify miles



S3024M49B(X)(S)C



S3024M49B(L)(X)(S)C S3024M49(L)(X)(S)C

DETOUR



S3024M49A(L)(X)(S)C S3024M49C(L)(X)(S)C





S4836E52A(X)(S)C





S0824OM3(L/R)HAC

ACM Sheets



LEGEND

W202AH

W207AAH

W34

W221

W211

- 3MM Aluminum Composite Material (ACM) is made of two sheets of .021 Aluminum bonded to a thermoplastic core.
- ACM's flat rigid surface and weather resistance ensures long-term performance and durability.

Quantity

Discounts

Available

ACM is lightweight at only .8 lbs per sq ft RBACM3MM4896WHAL - 48" x 96"

Temporary CWZ Roll-Up Signs



Choose Sign Options: RMS(XX)(LEGEND)(L/R)(D)(M)

- Size (XX): (36) 36" | (48) 48"
- **Legend:** Include Left or Right (L/R) or **Distances (D)**: as required: • 500 ft (05) • 1000 ft (10) • 1500 ft (15) • 1/2 mile (5M) • 1 mile (1M) • Ahead (AH)
- Sign Types and Material (M):

(D) 3M Diamond Grade | Standard Vinyl Pockets | Ribs Sold Separately (H) 3M High Intensity | Standard Vinyl Pockets | Ribs Sold Separately (N) Econo Mesh Non Reflective | Standard Vinyl Pockets | Ribs Sold Separately (CSD) Marathon Diamond Grade | Compact Wrap & Roll System


(CSH) Super Brite High Intensity | Compact Wrap & Roll System

Compact Wrap & Roll Signs are part of a Premium Space Saving System that come pre-installed with hinged, integrated cross bracing to work in conjunction with the MDI Compact Sign Stand-RPOTTCS23612DLK and a Carrying Case to hold one collapsed Sign and the Stand. The sign is already latched into the stand allowing deployment in mere seconds!

Call Customer Service for more info.

RMSR(36/48)

(36) 36" or (48) 48" Roll-Up Sign Ribs







W207 Flagger Ahead Symbol W207BAH Flagman Ahead W42(L/R) (Left/Right) Lane Ends Merge Symbol W205(L/R)(D) (Left/Right) Lane Closed (Distance) W211D Litter Crew Ahead W211B Men Working Mowers Ahead W211C One Lane Road Ahead **W204AH** W201(D) Road Work (Distance) W203 **Road Closed** W203AH Road Closed Ahead W213AH Road Machinery Ahead swc Sheriff's Work Crew W216AH Survey Crew Ahead W214TAH Tree Work Ahead W414 Trucks Entering Highway W217(D) Utility Work (Distance) W211AAH Workers Ahead **W218AH**

Work Area Ahead

Workers Symbol

Be Prepared To Stop

Blasting Zone

Detour Ahead

Flagger Ahead

Standard Roll-Up Sign Ribs **SOLD Separately. Heavy Duty Ribs** available upon request.

Partially Finished Fluorescent Orange Diamond Grade Signs



S3636BOBKOR(D)ACD S4848BOBKOR(D)ACD

Complete the partially finished signs in your sign shop by adding standard or custom legend signs (CLS) or number in blank space, as appropriate.




S4848W201F(D)AC



S1818W131PB(D)AC S2424W131PB(D)AC S3030W131PB(D)AC



S3618G201B(D)AC S4824G201B(D)AC

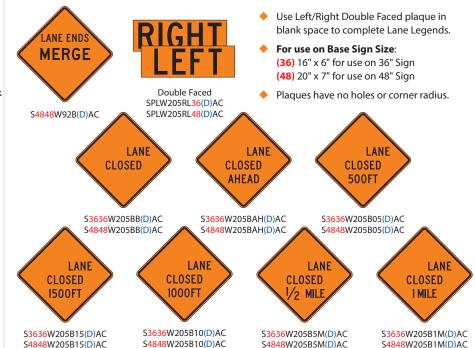



Double Pavement Transition S3636W42D(D)AC S4848W42D(D)AC

Use the Straight Line Plaque with the **Double Pavement** Transition sign to create 3 options in pavement transitions; left lane, right lane and double lane transitions.



Straight Line Plague SPLW42DO36(D)AC SPI W42DO48(D)AC



48" x 16" Plaque for 48" x 60" Speed Limit Sign BA080(D)OR4816BM More sizes available, see page 15

Interchangeable Overlay Plagues for Base Signs

Interchangeable Overlay Plagues give the ability to change the message of MUTCD Legends W20-1, W20-3 & W21-7.

Interchangeable Overlay Plaques

Line 1

Line 2



Line 3

- PRODUCT ID: SPLW201(XX)(L)(S/D)(X)AC
- For use on Base Sign Size (XX): (36) 36" x 36" | (48) 48" x 48"
- Line (L): (1) ROAD, STREET, UTILITY (2) WORK, CLOSED | (3) AHEAD, 500 FT, 1000FT, 1500FT, 1/2 MILE
- Sides (S/D): (S) Single-Faced (D) Double-Faced
- Reflective Sheeting (X): (D) VIP Diamond Grade TOP SELLER (3) DG3 Diamond Grade Cubed | (H) High Intensity Prismatic
- Substrate: .080" Aluminum
- Plaques have no holes or corner radius.

Base Signs



ROAD **CLOSED** AHEAD

W20-3AH



- PRODUCT ID: S(XXXX)(L)(X)AC
- Base Sign Size (XXXX): (3636) 36" x 36" | (4848) 48" x 48"
- Legend (L): (W201AH) ROAD WORK AHEAD (W203AH) ROAD CLOSED AHEAD | (W217AH) UTILITY WORK AHEAD
- Reflective Sheeting (X): (D) VIP Diamond Grade TOP SELLER (3) DG3 Diamond Grade Cubed | (H) High Intensity Prismatic
- Substrate: .080" Aluminum
- **Standard Specifications**: Punched and Radiused to meet MUTCD standards. 36" x 36" Signs: (2) 3/8" holes punched at top and bottom for 1 post mount. 48" x 48" Signs: (4) 3/8" holes punched at top and bottom for 2 post mount.

Gemstone Vertical Panel Messaging Systems

- Body Colors: Orange, White or Black
- Body Size: 15.4" W x 45" H
- Weight: 4 lbs.
- Sign Legend: We can turn any standard or special legend sign into a vertical panel message system or customize your message with the help of our skilled art department.
- Sign Size: 8" wide x 36" high sign fits into recessed panel on body.
- Oversized handle with comfort grip.


Flashing light mounting receptacle. Lights, Sold Separately.

- Compatibility: For use with Gemstone Vertical Panel Bases, Sold Separately.
- **BASE PRODUCT ID: RSPCVZBASE(XX)**
- Weight/Size (XX): (20) 20 lbs. | 20.25" x 20.25" (30) 30 lbs. | 20.25" x 28.25"
- Solid recycled rubber bases with carrying handles.











DISTANCE





YOUR CAR

















PLEASE

WAIT

HERE

MAINTAIN

Systems are ideal for social distancing quidance, restaurants, retail stores, parking lots, schools, churches, or business applications.

COVID-19 DRIVE-THRU

TEST SITE

PLEASE

STAY IN YOUR CAR

Plasticade Safety Signage



Narrowcade[®]

Holds signs 12"W x 24"H Dimensions: 45"H x 13"W Item #C165 Weight: 11 lbs.

Minicade *

Holds signs 12"W x 24"H Dimensions: 36"H x 13"W Item C155 Weight: 10 lbs.


Signicade °

Holds signs 24"W x 36"H Dimensions: 45"H x 25"W Item C130 Weight: 18 lbs.

Specifications	Standard	Additional Options Available	
Colors	White Orange or Yellow		
Reflectivity	HIP	3	
Usage	Barricade and Vertical Panel	Safety Signage	

Easy-Fold Sandwich Boards are a great option for Temporary Traffic Control when ease of use and portability are a must.

- Choose from 3 sizes and 3 body colors: White, Yellow or Orange
- 51 Standard Legends; Custom Legend Signs (CLS) also available.
- Hassle-free, guaranteed, professional application available on legends.
- Available as a blank, single or double sided.
- Sheeting: (H) High Intensity or (3) Diamond Grade Cubed or (E) Engineer Grade Prismatic
- School Zone Sheeting: Flo-Yellow Green Diamond Grade Cubed (3)
- May be internally ballasted with sand.



CODE	LEGEND/COLOR SCHEME	CODE	LEGEND/COLOR SCHEME	CODE	LEGEND/COLOR SCHEME	CODE	LEGEND/COLOR SCHEME
1005	10 MPH	1049	EXIT -	1102	PARKING LOT CLOSED	1162	STOP
1006	15 MPH	1016L	LEFT ARROW	1104	PARKING LOT FULL	1164	FOR PEDESTRIANS IN CROSSWALK
1007	20 MPH	1016R	RIGHT ARROW	1120	ROAD CLOSED	1170	POLICE CHECK POINT
1133	SLOW - Vertical	1073	← KEEP LEFT	1080	LANE CLOSED	1142	SLOW POLICE CHECK POINT AHEAD
1443	SLOW - Horizontal	1074	KEEP RIGHT -	1092	NO LEFT TURN	1177	SOBRIETY CHECK POINT
1465	SLOW WORK ZONE AHEAD	1043	← DETOUR	1095	NO RIGHT TURN	1150	SLOW SOBRIETY CHECK
1147	SLOW SCHOOL ZONE AHEAD	1044	DETOUR -	1084	MEN WORKING	1148	SLOW SHERIFF CHECKPOINT
9278	À SCHOOL CROSSING	1046	DO NOT ENTER	1086	MOWING AHEAD	1134	SLOW ACCIDENT AHEAD
1126	SCHOOL ZONE 10 MPH	1061	FUNERAL NO PARKING	1180	SURVEY CREW AHEAD	1136	SLOW EMERGENCY AHEAD
1127	SCHOOL ZONE 15 MPH	1093	NO PARKING	1190	TREE WORK AHEAD	1140	SLOW PEDESTRIAN CROSSING
1128	SCHOOL ZONE 20 MPH	1098	← PARKING	1191	UTILITY WORK AHEAD	1200	LEFT BARRICADE
1091	← NO EXIT	1099	PARKING -	1196	FLAGMEN AHEAD	1210	RIGHT BARRICADE
1048	EXIT	1100	↑ PARKING	1198	RESERVED		

Barriers & Barricades

Strongwall ADA Pedestrian Barricade



Use Strongwall to create ADA compliant walkway



- MASH Passed, meets or exceeds ADA Guidelines and MUTCD Standards, no trip hazard for pedestrians
- Linking sections fit together securely
- Top Wall rugged polyethylene
- Bottom Base 43 lbs. self weighted black base with carry handle. Stable in windy conditions, no sandbags needed!
- Modular system can be shaped to any layout and is quick and easy to install
- Anti-tamper linking system difficult for unauthorized personnel to dismantle when
- Compact stacking lowers transport costs
- Available in orange or white with or without retro-reflective sheeting.



Specifications	Standard	Additional Options Available
Color	Orange	White -or- Alternating Orange & White
Reflective Sides	2	1 on pedestrian side -or- 1 on outside
Reflectivity	NONE	HIP -or- ENG
Use of water or sand bags for stabilization	NONE: the base design eliminates the need	Fillable with up to 33 lbs of water

Sheeting Area 48" x 8" on both sides

Plasticade Water Filled Barricade System

- Durable construction, impact resistant.
- Conforms to any roadway design, can turn 90 degrees - linked units secured with connector pin - quick assembly and breakdown.
- Lightweight no heavy machinery needed for installation
- Stackable for transport and storage
- Can be moved while filled with water
- Accepts standard warning lights

- Accepts optional fence panels 54" W fencing with 8' H - 3" diameter posts
- MASH Passed and meets MUTCD Standards
- Uses: Block off Work Zone Areas from workers and public; Provides visual pathway for vehicles and pedestrians; Perimeter security; Crowd Control



60" L x 36" H | Weight Empty: 50 lbs. | Weight Filled: 683 lbs.

Specifications	Standard	Additional Options Available
Color	Orange or White	NONE
Reflective Sides	2	No Reflective
Reflectivity	HIP	NONE -or- ENG
Use of water or sand bags for stabilization	NONE	Fillable with sand or up to 72 gallons of water

Crowdcade Control Barrier

- Linking bracket accommodates various configurations - units pivot on bracket and adjust to uneven ground
- Easy stacking, no tangling of feet that rotate flat for stacking
- Panels on both sides for retro-reflective sheeting
- Holes for signs to be affixed
- Sturdy, durable thick, double wall panel

Sheeting Area 5.5" x 51" on both sides



Crowdcade Deluxe Control Barrier

♦ Double locking hooks accommodate various configurations - units pivot on hooks and adjust to uneven ground

Stands up to large crowds with steel legs integrated with barricade panel to prevent top-over.

RSPCSPCWH6 - White

- Unique Quick-Change™ system makes it easy to insert signs
- Sturdy and extra durable Feels as solid as steel, but won't rust -50% thicker double wall panel, prevents warping or bending. (when compared to Crowdcade)



- Non-conductive (dielectric), no metal used
- Great for protecting any area requiring temporary restriction of access
- Hinged clips make it easy to configure sections into rectangles of various sizes - locking clamp to be used for straight sections
- Folds up for storage and sets up quickly
- Carry handles for transport
- Longer life than metal, replacement sections available
- Available in yellow

Trench Covers & Curb Ramps

44.3" L x 44.3" W

Weight: 62 lbs.

• Lighter than Steel • Stronger than Wood • Anti-Slip Surface • Deters Metal Thieves •



Trench Covers - 27" or 35"

- Two sizes designed to cover trenches up to 27" or 35".
- Takes the vehicle weight up to 4,410 lbs.
- Beveled edge prevents tripping
- Molded from a single piece of fiberglass composite - underside has ribbed framework for added strength
- Recommended bolting to road surface



Specifications					
Traffic Type	Vehicle & Pedestrian	Pedestrian Only			
	27" Trench Cover 35" Trench Cover Road Plate	Ped Trench Cover SafeKerb Ramp			
Trench Widths	Up to 27" Wide	Up to 35" Wide			
	27" Trench Cover 35" Trench Cover Road Plate Ped Trench Cover	35" Trench Cover Road Plate			
Vehicle Weight Limit	Up to 4, 410 Lbs	Up to 14,520 lbs per wheel			
	27" Trench Cover 35" Trench Cover	Road Plate			



SafeKerb Ramp

- Adapts to curb heights from 3" to 6.3"
- ♦ Withstands loads up to 553 lbs.
- ♦ Raised sides prevent vehicle run off
- Molded from high density polyethylene
- Stacks for transport and storage
- Bolt to road and walkway surface for added stability



Road Plate: 59" L x 19.7" W | Weight - 96.8 lbs. End Section: 59" L x 19.7" W | Weight - 50.6 lbs.



Pedestrian Trench Cover

- ♦ Pedestrians Only takes up to 553 lbs.
- Covers trenches up to 27.5"
- Smooth rubber edge greatly reduces tripping hazard
- Resists sliding, no need to bolt down flexible material which grips the surface underneath

Road Plate

- Easy to install modular system with no special equipment needed, weighs 97 lbs. per section
- Tested to vehicle weights of 96,800 lbs -Single wheel load, 14,520 lbs.
- No rust or corrosion
- Long lasting polymer material
- No "rattle" from crossing vehicles
- Design slows traffic for increased safety
- Features "Drop Pins" that increase stability - pins protrude into trench preventing lateral movement of plate
- Steel linking brackets lock sections together
- End sections must be bolted to ground in order to lock unit into position
- Stacks securely for transportation and storage

Safety Vests

Economy Safety Vest ANSI/ISEA 107-2015 Class 2

ANSI/15EA 107 2015 Class

RSAGV2EOSDVM(XX)N Orange RSAGV2ELSDVM(XX)N Lime

Zipper Closure Vest with Reflective Striping.

RSAGV2EOSDZM(XX)N Orange RSAGV2ELSDZM(XX)N Lime Hook & Loop Closure Mesh Vest with Reflective Striping.

Specify Size (XX) (L), (XL), (2X)



Two-Tone Safety Vests ANSI/ISEA 107-2010 Class 2

RSAGV2SLSDZM(XX)N - Lime RSAGV2SOSDZM(XX)N - Orange

Hook & Loop Closure, Reflective Striping, Contrasting Trim & 1 Upper Left Front Pocket and 1 Lower Right Inside Pocket.

Specify Size (XX)
(M) fits M, (L) fits L,
(XL) fits XL, (2X) fits 2XL



Premium Safety Vest


ANSI/ISEA 207-2006 Class 3/Type R RSAGV35PBLSSZM(XX)N - Lime

5-Point Breakaway with Zipper Front Closure, Reflective Stripes, Contrasting Trim, 2 Upper Outside Pockets and 2 Lower Inside Pockets.

Specify Size (XX): (ML) fits M-L, (XL2X) fits XL-2XL (3X5X) fits 3XL-5XL



Work Zone Sign Stands



30TRI Tri-pod Stand

RPOTTCE30TRI - Universal Brackets

- For use with 36" or 48" Roll-Up or Rigid Signs in no wind to low wind speed conditions on low volume, rural or 2-lane roads.
- 16 GA steel construction with a powder coat orange finish.
- Above Grade Clearance of 12".
- Folded Dimensions: 62" x 4.5" x 3"
- Open Footprint: 46" x 60"
- Weight: 12 lbs.



For use with 36" Roll-Up Signs in no wind to low wind speed conditions on low volume, rural or 2-lane roads.

- Above Grade Clearance of 12".
- Less than 1 cubic foot when stored.
- Weight: 20 lbs.



WM5012SS Compact WindMaster® Stand

- For use with 36" & 48" Roll-Up Signs in no wind to high wind speed conditions on low volume, rural or 2-lane roads.
- Above Grade Clearance of 12".
- Requires 1 cubic foot of storage space.
- Weight: 20 lbs.

Screw Lock RPOTTCS1WM5012SS

WM4818K Mid-Size Stand WindMaster® RPOTTCS2WM4818(KX)

K1-Roll Up

K2 - Rigid

K3 - Dual

Above Grade Clearance of 18".

Weight: 32 lbs.

For use with 36" & 48" Roll-Up and Rigid Signs in no wind to high wind speed conditions on low to medium volume, 2 or 4-lane roads. 3 Flag

holder included.



Full-Size Stand

For use with 36" & 48" Roll-Up and Rigid Signs in no wind to high wind speed conditions on low to high volume, 2 or 4-lane roads.

> RPOTTCS2SZZROLLUPB Roll-Up Bracket



Above Grade Clearance of 5'/60" Weight: 42 lbs. | 48 lbs. w/rigid assembly

Above Grade Clearance of 7'/84" Weight: 44 lbs. | 50 lbs. w/rigid assembly

Median Barrier Clamp

For use with 36" & 48" Roll-Up and/or Rigid Signs in no wind to high wind speed conditions.


ROAD



- WindMaster® dual springs and telescoping upright.
- Attaches firmly to median barrier with four, screw-in T-handle spikes.
- 3-Flag Holder included, flags sold separately.

RPOTTCMBCSA114818K2- Rigid Sign Holder | 5"-11" Clamp Range | 40.85 lbs. RPOTTCMBCSA114818K3- Rigid/Roll-up Sign Holders | 5"-11" Clamp Range

RPOTTCMBCSA154818K2- Rigid Sign Holder | 9"-15" Clamp Range RPOTTCMBCSA154818K3- Rigid/Roll-up Sign Holders | 9"-15" Clamp Range

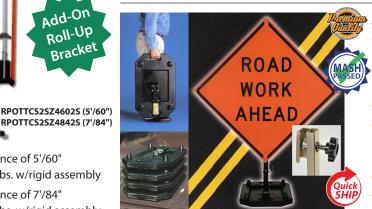

Zephyr Stand

- For use with 36" & 48" Roll-Up Signs in no wind to low wind speed conditions on low volume, rural or 2-lane roads.
- Above Grade Clearance of 12".
- Recycled rubber base folds to 4" high & has stacking lugs for easy transport & storage.
- Molded in carrying handles.
- Weight: 38 lbs. RPOTTCR26000USH - Universal Bracket

Barricade Lights



Type A, C, and 3 Way

- Flasher, steady burn & OFF
- "D" cell
- High efficiency LED bulbs
- Redesigned rugged and durable case

RSPBL3LDYY Yellow Lens **RSPBL3LDRY** Red Lens





Type A, C, and 3 Way Solar Assist LED

- Flasher, steady burn, and OFF
- 3 Volt high efficiency lights
- LED bulbs
- Internal solar panels trickle charge "D" cell alkaline batteries to give a superior long lasting more reliable power source.

RSPBL3LDYYSA Yellow Lens



Type B Solar LED

- Daytime Use
- High Intensity Flashing
- LED bulbs
- Power Options: Solar panel trickle charges "D" Cell -or- Fully Solar **Power Battery**

RSPBLBL3YYSA Yellow Lens | D Cell Solar RSPBLBL3RYSA Red Lens | D Cell Solar RSPBLBLSYY - Yellow Lens | Fully Solar



Type A & C Solar LED

- 4-5 year expected life.
- LED bulbs
- True Solar Powered light with rechargeable NiMH rechargeable battery included

RSPBL3LSYY Yellow Lens **RSPBL3LSRY** Red Lens



Type B LED

- Detachable lens available upon request
- 6 Volt battery
- LED bulb

RSPBLBL6YY Yellow Lens RSPBLBL6RY Red Lens

Safety Flags



- ♦ 18" or 24" Fluorescent Red/Orange vinyl coated nylon or mesh available
- ♦ 24" flag required for flagging operations
- ♦ 18" or 24" flag suitable to mount above a traffic control sign or device
- ♦ 3/4" wood dowels





Mounting Bracket



Brackets line the light to requirements and

Barricade Light Brackets

Brackets allow proper alignment of light I.T.E. Specifications require the lights to be

mounted with base of the light perpendicular

RSPBLZHBR1278R **Right Side Mounting Bracket**



to the around line

RSPBLZHBR1277 **Z Mounting Bracket** (Not for Diamond Shaped Signs)



RSPBLZHBRBARRIERL Barrier L **Mounting Bracket**

RSPBLZHBR1276 **Center Mounting Bracket**

Vehicle Mount Sign Holders

Vehicle Hitch Mount Sign Holder

- Transforms standard 2" square vehicle hitches into a sign holder.
- Universal screw lock attaches to fiberglass rib on a roll-up sign. (Roll-up Signs are Sold Separately)
- Ideal for rolling crews.
- Weight: 8 lbs
- Product ID: RPOTTLSA43921



Pilot Car Safety

RVSCT983320250

SMV Emblem

RVSSMV10H Aluminum ASAE/ANSI approved RVSSMV10 Aluminum | RVSSMV20 Decal



S3618G204(X)AC

Conspicuity Tape

- 2" x 50 yds with red and white pattern repeats
- Meets all requirements for marking vehicles

2025 | Catalog#18





STOP/SLOW Hand Paddles

SAVE MONEY by purchasing one of our Economy, Premium or EZ Connect Hand Paddle Kits.

Custom Hand Paddles available by purchasing individual components of your choice. Use the Customized Easy Order Checklist below to build a hand paddle to your specifications. Paddles are universally punched to accept all handle types in this catalog.

Use STOP/STOP Hand Paddles in School Zones, and STOP/SLOW Hand Paddles at Events, for Incident Management, or in Construction Work Zones.

Customized Easy Order Checklist

Paddle Material

Aluminum: □.040" □.080"

ABS Plastic: □.125"

2 Reflective Type

□(DH) Fluorescent Orange **Diamond Grade & High Intensity Prismatic**

□(D3) Fluorescent Orange **Diamond Grade & Diamond Grade Cubed**

□(H) *ALL* High Intensity Prismatic

 \Box (E) *ALL* Engineer Grade

□(B) Non-Reflective

□None

□YES (for conduit handle only)

3 Legend □STOP/SLOW □STOP/STOP

(School Zone)

4 Paddle Size

□18" x 18" □24" x 24"

5 Handle Type and Size

Galvanized Steel: □10" □18"

Wood: □12" □18"

Gray PVC Plastic: □18" (12" Grip Area)

🖯 4.5" Vynafoam Grip

7 Staff Size and Type

□None □60" □72"

☐Galvanized Steel Conduit

□Wood

☐Gray PVC Plastic -

must use with 18" PVC handle - the PVC handle and staff have been matched together and tested for a good fit.

ALL Handles &

Staffs come with standard

hardware

Shipping Requirement

□Unassembled - Recommended

□ **Assembled** - oversized freight charges may apply and freight damage is more likely to occur.

> ALL handles and staffs include appropriate hardware



Value Minded Non-Reflective 18" x 18" hand paddles made of .040" aluminum with 10" Galvanized Steel Conduit Handle

SHP1818SL040BK10C



STOP/SLOW **Durable Reflective** 18" x 18" hand paddles made of .080" aluminum

> High Intensity (H) reflective with 60" Conduit Staff SHP1818SL080HK60C

Vynafoam Grip HPZFOAMGRIP

foam grip for conduit handles

- Use on Conduit Paddle Handles
- Color: Black Size: 3/4" diameter x 4.5" long
- Soft, velvet-like finish with the comfort of foam and durability of vinyl.

CONNECT Hand Paddle Kits

The Leader in Safety and Convenience

.125" Black ABS plastic sign on Gray PVC "Snap Together" plastic handle

> SHP(XXXX)SLABS (XX) REFLECTIVE COMBO HEAD SIZE

- 2 Head Sizes: 18" x 18" (1818) Paddle - 4.6 lbs. 24" x 24" (2424) Paddle - 5.6 lbs.
- 2 Staff Lengths: 72" (72) or 84" (84) to bottom of sign
- The PVC handle and staff which make up the length have been matched together and tested for a good fit.
- 18" Handle with 12" grip area can be used by itself as a hand paddle or attach to a staff.

- **Meets Federal Specifications**
- Non-Conductive, Non-Corrosive, Lightweight
- No couplings or threads involved.



Choose from 4 Reflective Combinations:

NON

CONDUCTIVE

Fluorescent Orange Diamond Grade & High Intensity Prismatic (DH)

Fluorescent Orange Diamond Grade & Diamond Grade Cubed (D3)

ALL High Intensity Prismatic (H)

ALL Engineer Grade (E)



Custom Products Corporation

P.O. Box 54091 Jackson, MS 39288-4091 www.cpcsigns.com



PRST STD U.S. Postage PAID Custom Products Corporation

CWZ - CAT18-2025











Mail:

P.O. Box 54091 Jackson, MS 39288-4091

Shipping:

1120 Flowood Dr. Jackson, MS 39232

EMAIL sales@cpcsigns.com



Sales:

1-800-367-1492 (Voice)

1-601-932-5854 (Voice)

1-800-206-3444 (Fax)

1-601-932-7178 (Fax)

find us on social media













CPCGo! - mobile app

WEBSITE www.cpcsigns.com