



1-800-367-1492 • www.cpcsigns.com

CUSTOM STREET NAME PACKAGES, SYSTEMS & COMPONENTS



PRE-DESIGNED PACKAGES

CLARKSDALE












*Specify Breakaway Ground Mount

ITEM CODE	Ground Type
RPORZVR1P330RNC	New Concrete
RPORZVR330R	Soft Soil
RPORZVR330RC	Existing Concrete
OPOZEUGPBSB100BK	Surface Mount

The Clarksdale Packages are our most cost-effective ornamental packages.

Pre-designed packages save time and money.

NOTE: All Signs come standard with High Intensity Prismatic (HIP) sheeting. All Street Name Signs come standard as a Flat, Double-Faced Sign Blade. Bases, Posts, Brackets and Hardware are powder coated semi-gloss black for an elegant look.





4-Way Intersection Package Options		Standard Ground Mount Package Codes	Breakaway Mount* Package Codes
Post System with Stop Sign & (2) 6" x 30" Blades	 For use on low volume roads with Speed Limits of 25 MPH or less	O10100	O11100
Post System with (2) 6" x 30" Blades		O10200	O11200
Post System with Stop Sign & (2) 9" x 36" Blades	 For use on higher volume, conventional roads with Speed Limits over 25 MPH	O10150	O11150
Post System with (2) 9" x 36" Blades		O10250	O11250
Traffic Sign Package Options		Standard Ground Mount Package Codes	Breakaway Mount* Package Codes
Post System with 30" STOP Sign		O10300	O11300
Post System with 36" YIELD Sign		O10400	O11400
Post System with 30" Warning Sign (Specify MUTCD Sign Code)		O10500	O11500
Post System with 24" x 30" SPEED LIMIT Sign (Specify Speed)		O10650	O11650
Post System with 12" x 18" Parking Sign (Specify Sign Legend)	  	O10700	O11700


PRE-DESIGNED PACKAGE COMPONENTS







CLARKSDALE










 <p>Package Post come in pre-determined 10', 12' or 14' length that ensure the signs meet Federal mounting height requirements.</p> <p>3" Round Fluted Aluminum Post OPOR3AF(XX)125BK</p>  <p>Post Base OPOZBR3SB33BK</p>	Post System	 <p>5.5" Crosspiece OSIZ1CRP990FBK</p>  <p>5.5" Round Post Cap OSIZ1R3P993FBK</p>  <p>12" Crosspiece OSIZ1CRJ412CFBK</p> <p>12" Round Post Cap OSIZ1R3J412RFBK</p> <p>(Sign brackets include black set screws)</p>	Sign Brackets
---	--------------------	--	----------------------

 <p>Round Post Anchor Plate BA080APLATE238 (keeps post from rotating)</p>  <p>Self Tapping Metal Screw RH141HEX (2 screws included in package)</p>	Standard Ground Mount	 <p>OPOZEUGPBSB100BK Surface Mount</p> <p>RPORZVR1P330RNC - New Concrete RPORZVR330R - Soft Soil RPORZVR330RC - Existing Concrete</p>	Breakaway Mount	 <p>Closure Cap OPOZFR3CPCLCAP30BK for Traffic Sign Post System (includes black set screws)</p>	Closure Cap
---	------------------------------	--	------------------------	--	--------------------

<p>Sign Blades M2AH(X)D0630SBM42N - 6" x 30" Sign Blades M2AH(X)D0936SBM63N - 9" x 36" Double-Sided White HIP (2 sign blades included in package) Choose Standard Color Scheme (X)</p> <p><input type="checkbox"/> (A) White on Green</p> <p><input type="checkbox"/> (B) White on Blue</p> <p><input type="checkbox"/> (C) White on Brown</p> <p><input type="checkbox"/> (D) Black on White</p> <p><input type="checkbox"/> (E) White on Black</p>	Sign Blades	 <p>Decorative Top Finial OPOZF1317FBK (includes black set screw)</p>	Decorative Top Finial
--	--------------------	---	------------------------------

 <p>30" x 30" STOP Sign S3030R11HA HIP Sheeting</p>	 <p>36" x 36" x 36" YIELD Sign S3636R12HA HIP Sheeting</p>	 <p>30" x 30" Warning Sign S3030(XXX)HA HIP Sheeting <i>*Specify Legend</i></p>	 <p>24" x 30" SPEED LIMIT Sign S2430R21(XX)HA HIP Sheeting <i>*Specify Speed</i></p>	 <p>12" x 18" Parking Sign S1218(XXXX)HA HIP Sheeting <i>*Specify Legend</i></p>	Traffic Signs	 <p>U-Bolt Clamps OTSBR3UBCLAMP3BK (Set of 2 included in each package for mounting traffic sign to post)</p>	U-Bolt Clamps
--	--	---	--	---	----------------------	---	----------------------

 <p>30" x 30" Laminate Vinyl Backer OTSBL3030BK</p>	 <p>36" x 36" x 36" Laminate Vinyl Backer OTSBL3636BK</p>	 <p>30" x 30" Laminate Vinyl Backer OTSBL3030BK</p>	 <p>24" x 30" Laminate Vinyl Backer OTSBL2430BK</p>	 <p>12" x 18" Laminate Vinyl Backer OTSBL1218BK</p>	Traffic Sign Backers	<p>RH141HEXSETTER Driver For Self-Tapping Screws</p> <p>Installation Tools SOLD Separately</p>  <p>RHBSKT100 Allen Wrench Tool For Set Screws</p> 
--	---	---	---	--	-----------------------------	--



PRE-DESIGNED PACKAGES

NATCHEZ












The Natchez Packages are the simplistic, sleek and modern version of the Oxford Packages.

Pre-designed packages save time and money.

NOTE: All Signs come standard with High Intensity Prismatic (HIP) sheeting.
All Street Name Signs come standard as a Flat, Double-Faced Sign Blade. Bases, Posts, Brackets and Hardware are powder coated semi-gloss black for an elegant look.



4-Way Intersection Package Options		Standard Ground Mount Package Codes	Breakaway Mount* Package Codes
Post System with Stop Sign & (2) 6" x 30" Blades	 For use on low volume roads with Speed Limits of 25 MPH or less	O20100	O21100
Post System with (2) 6" x 30" Blades		O20200	O21200
Post System with Stop Sign & (2) 9" x 36" Blades	 For use on higher volume, conventional roads with Speed Limits over 25 MPH	O20150	O21150
Post System with (2) 9" x 36" Blades		O20250	O21250
Traffic Sign Package Options		Standard Ground Mount Package Codes	Breakaway Mount* Package Codes
Post System with 30" STOP Sign		O20300	O21300
Post System with 36" YIELD Sign		O20400	O21400
Post System with 30" Warning Sign (Specify MUTCD Sign Code)		O20500	O21500
Post System with 24" x 30" SPEED LIMIT Sign (Specify Speed)		O20650	O21650
Post System with 12" x 18" Parking Sign (Specify Sign Legend)	  	O20700	O21700

*Specify Breakaway Ground Mount

ITEM CODE	Ground Type
RPORZVR1P330RNC	New Concrete
RPORZVR330R	Soft Soil
RPORZVR330RC	Existing Concrete
OPOZUGPBSB100BK	Surface Mount



PRE-DESIGNED PACKAGE COMPONENTS

NATCHEZ



3" Round
Steel Post
OPOR35(XX)14BK(P2)

Package Posts come in pre-determined 10', 12' or 14' lengths that ensure your signs meet the Federal mounting height requirements. Posts are pre-drilled to eliminate field drilling!



Post Base - **OPOZBR39993BK**
(includes 2 set screws)

Post System



Cantilever Wing Brackets
OSIZ2UNCT800BK - 24" Long
(2 brackets and black set screws included in package)

Sign Brackets



Round Post
Anchor Plate
BA080APLATE238
(keeps post from rotating)



Self Tapping
Metal Screw
RH141HEX
(2 screws included in package)

Standard Ground Mount



OPOZEUGP85B100BK
Surface Mount

RPORZVR1P330RNC - New Concrete
RPORZVR330R - Soft Soil
RPORZVR330RC - Existing Concrete

Breakaway Mount



Pineapple Finial
OPOZFR3657MDBK
(includes 3 black set screws)

Finial

Sign Blades **M2AH(X)D0630SBM42N** - 6" x 30"
Sign Blades **M2AH(X)D0936SBM63N** - 9" x 36"
Double-Sided | White HIP
(2 sign blade sets included in package)
Choose Standard Color Scheme (X)

☐ (C)

White on Brown

☐ (A)

White on Green

☐ (D)

Black on White

☐ (B)

White on Blue

☐ (E)

White on Black

Sign Blades



Hardware Set **OZHRH03**
(Set of 4 for mounting
2 sign brackets to post)

Hardware Set



30" x 30"
STOP Sign
S3030R11HA
HIP Sheeting



36" x 36" x 36"
YIELD Sign
S3636R12HA
HIP Sheeting



30" x 30"
Warning Sign
S3030(XXX)HA
HIP Sheeting
**Specify Legend*



24" x 30"
SPEED LIMIT Sign
S2430R21(XX)HA
HIP Sheeting
**Specify Speed*




12" x 18"
Parking Sign
S1218(XXX)HA
HIP Sheeting
**Specify Legend*

Traffic Signs




U-Bolt Clamps
OTSBR3UBCLAMP3BK
(Set of 2 included in each
package for mounting
traffic sign to post)


U-Bolt Clamps



30" x 30"
Laminated Vinyl Backer
OTSBL3030BK



36" x 36" x 36"
Laminated Vinyl Backer
OTSBL3636BK



30" x 30"
Laminated Vinyl Backer
OTSBL3030BK



24" x 30"
Laminated Vinyl Backer
OTSBL2430BK



12" x 18"
Laminated Vinyl Backer
OTSBL1218BK

Traffic Sign Backers



RH141HEXSETTER
Driver For Self-Tapping Screws

Installation Tools
SOLD Separately



RHBSKT100
Allen Wrench Tool
For Set Screws



PRE-DESIGNED PACKAGES








VICKSBURG

The Vicksburg Packages provide a unique and stark contrast to the other package design options.

Pre-designed packages save time and money.

NOTE: All Signs come standard with High Intensity Prismatic (HIP) sheeting. All Street Name Signs come standard as a Flat, Double-Faced Sign Blade. Bases, Posts, Brackets and Hardware are powder coated semi-gloss black for an elegant look.



4-Way Intersection Package Options		Standard Ground Mount Package Codes	Breakaway Mount* Package Codes
Post System with Stop Sign & (2) 6" x 36" Blades	 For use on low volume roads with Speed Limits of 25 MPH or less	030100	031100
Post System with (2) 6" x 36" Blades		030200	031200
Post System with Stop Sign & (2) 9" x 36" Blades	 For use on higher volume, conventional roads with Speed Limits over 25 MPH	030150	031150
Post System with (2) 9" x 36" Blades		030250	031250
Traffic Sign Package Options		Standard Ground Mount Package Codes	Breakaway Mount* Package Codes
Post System with 30" STOP Sign		030300	031300
Post System with 36" YIELD Sign		030400	031400
Post System with 30" Warning Sign (Specify MUTCD Sign Code)		030500	031500
Post System with 24" x 30" SPEED LIMIT Sign (Specify Speed)		030650	031650
Post System with 12" x 18" Parking Sign (Specify Sign Legend)		030700	031700

*Specify Breakaway Ground Mount

ITEM CODE	Ground Type
RPORZVR1P330RNC	New Concrete
RPORZVR330R	Soft Soil
RPORZVR330RC	Existing Concrete
OPOZEUGPBSB100BK	Surface Mount



PRE-DESIGNED PACKAGE COMPONENTS

VICKSBURG



3" Round Fluted
Aluminum Post
OPOR3AF(XX)125BK(P3)

Package Posts come in pre-determined 10', 12' or 14' lengths that ensure your signs meet the Federal mounting height requirements. Posts are pre-drilled to eliminate field drilling!



Post Base
OPOZBR35B33BK


Post System



J - 6" x 6"

C - 9" x 9"

Logo Trim Bracket
OSIZ3UN(J/C)TRIMLOGOBK
(2 brackets included in package)



J - 6" x 36"

C - 9" x 36"

Sign Trim Bracket
OSIZ3UN(J/C)TRIM36BK
(2 brackets included in package)

Sign Brackets



Round Post
Anchor Plate
BA080APLATE238
(keeps post from rotating)



Self Tapping
Metal Screw
RH141HEX
(2 screws included in package)

Standard Ground Mount



OPOZEUGP5B100BK
Surface Mount

RPORZVR1P330RNC - New Concrete
RPORZVR330R - Soft Soil
RPORZVR330RC - Existing Concrete

Breakaway Mount



Ball Finial
OPOZFR3FINB3BK
(includes 3 black set screws)

Finial

Sign Blades **M2AH(X)D(0636)SBM42N** - 6" x 36" | Sign Blades **M2AH(X)D(0936)TBM63N** - 9" x 36"
Sign Logo Blades **OSI3(J/C)LOGOHWH** - (J) 6" x 6" | (C) 9" x 9"
Double-Sided | White High Intensity Sheeting
(2 sign blades & 2 logo plaques included in package)
Choose Standard Color Scheme (X)



White on Green



White on Blue



White on Brown



Black on White



White on Black

Sign Blades



Hardware Set **OZHRH03L3**
(Set of 4 for mounting
2 sign brackets to post)

Hardware Set



30" x 30"
STOP Sign
S3030R11HA
HIP Sheeting



36" x 36" x 36"
YIELD Sign
S3636R12HA
HIP Sheeting



30" x 30"
Warning Sign
S3030(XXX)HA
HIP Sheeting
**Specify Legend*



24" x 30"
SPEED LIMIT Sign
S2430R21(XX)HA
HIP Sheeting
**Specify Speed*




12" x 18"
Parking Sign
S1218(XXX)HA
HIP Sheeting
**Specify Legend*

Traffic Signs




U-Bolt Clamps
OTSBR3UBCLAMP3BK
(Set of 2 included in each
package for mounting
traffic sign to post)


U-Bolt Clamps



33" x 33"
Aluminum Plate
OTSBP30300BK



39" x 39" x 39"
Aluminum Plate
OTSBP3636TBK



33" x 33"
Aluminum Plate
OTSBP3030DBK



27" x 33"
Aluminum Plate
OTSBP2430BK



15" x 21"
Aluminum Plate
OTSBP1218BK

Traffic Sign Backers



RH141HEXSETTER
Driver For Self-Tapping Screws

Installation Tools
SOLD Separately




RHBSKT100
Allen Wrench Tool
For Set Screws



PRE-DESIGNED PACKAGES



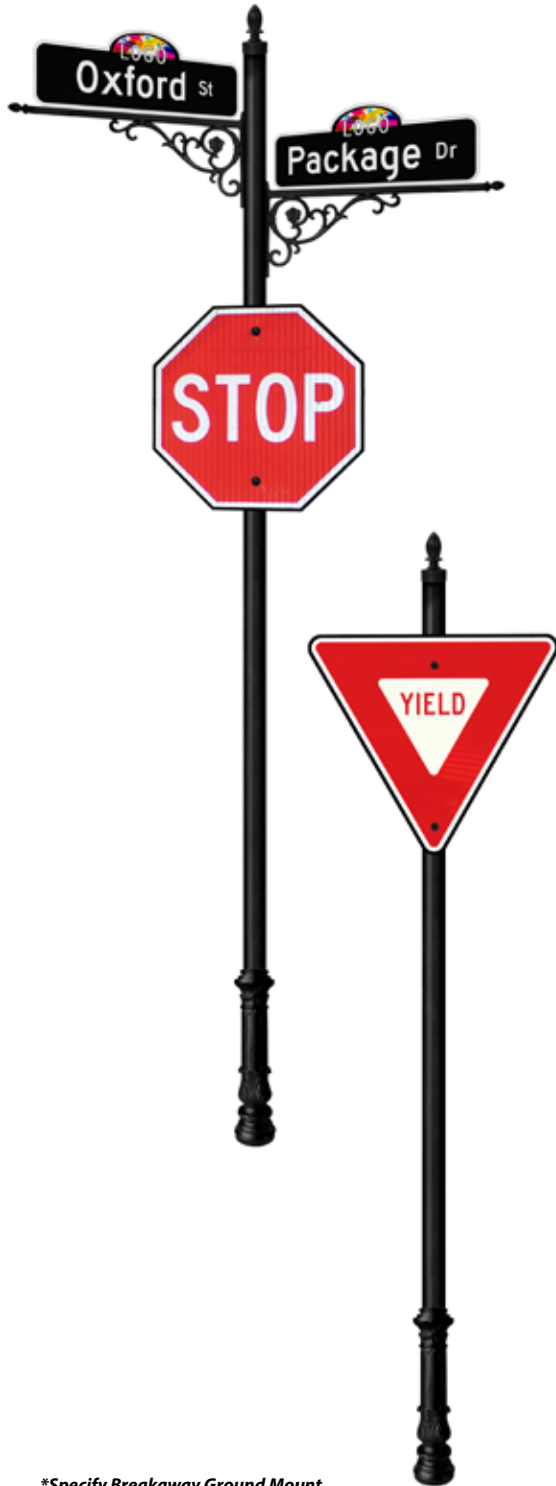






OXFORD



The Oxford Packages are based on our original and most popular ornamental system.

Pre-designed packages save time and money.

NOTE: All Signs come standard with High Intensity Prismatic (HIP) sheeting. All Street Name Signs come standard as a Flat, Double-Faced Sign Blade. Bases, Posts, Brackets and Hardware are powder coated semi-gloss black for an elegant look.

4-Way Intersection Package Options		Standard Ground Mount Package Codes	Breakaway Mount* Package Codes
Post System with Stop Sign & (2) 30" Blades	 For use on low volume roads with Speed Limits of 25 MPH or less	O40100	O41100
Post System with (2) 30" Blades		O40200	O41200
Post System with Stop Sign & (2) 36" Blades	 For use on higher volume, conventional roads with Speed Limits over 25 MPH	O40150	O41150
Post System with (2) 36" Blades		O40250	O41250
Traffic Sign Package Options		Standard Ground Mount Package Codes	Breakaway Mount* Package Codes
Post System with 30" STOP Sign		O40300	O41300
Post System with 36" YIELD Sign		O40400	O41400
Post System with 30" Warning Sign (Specify MUTCD Sign Code)		O40500	O41500
Post System with 24" x 30" SPEED LIMIT Sign (Specify Speed)		O40650	O41650
Post System with 12" x 18" Parking Sign (Specify Sign Legend)	  	O40700	O41700

*Specify Breakaway Ground Mount

ITEM CODE	Ground Type
RPORZVR1P330RNC	New Concrete
RPORZVR330R	Soft Soil
RPORZVR330RC	Existing Concrete
OPOZEUGPBSB100BK	Surface Mount



PRE-DESIGNED PACKAGE COMPONENTS

OXFORD



 <p>3" Round Steel Post OPOR35(XX)14BK</p>	<p>Package Posts come in pre-determined 10', 12' or 14' lengths that ensure your signs meet the Federal mounting height requirements. Posts are pre-drilled to eliminate field drilling!</p>	 <p>Post Base - OPOZBR39993BK (includes 2 set screws)</p>	Post System	 <p>Dogwood Sign Arm Brackets OSIZ4UN(J/C)DOGWDLDBK J - 30" C - 36" (2 brackets included in package)</p>	Sign Brackets	 <p>Black Torx Head Screws OZHRHBT140 (included with sign arm brackets for mounting 2 bent lip design street name signs to sign arm brackets)</p>	Hardware Set
 <p>Round Post Anchor Plate BA080APLATE238 (keeps post from rotating)</p>	 <p>Self Tapping Metal Screw RH141HEX (2 screws included in package)</p>	Standard Ground Mount	 <p>OPOZEUGPBSB100BK Surface Mount</p> <p>RPORZVR1P330RNC - New Concrete RPORZVR330R - Soft Soil RPORZVR330RC - Existing Concrete</p>	 <p>Breakaway Mount</p>	 <p>Spear Finial OPOZFR39516MDBK (includes 3 black set screws)</p>	Finial	
<p>Double-Sided Sign Blades OSI41001(J/C)HWH J - 30" x 11" C - 36" x 13.5" White High Intensity Sheeting (2 sign blades included in package) Choose Standard Color Scheme (X)</p>			<div><div><input type="checkbox"/> (A) </div><div><input type="checkbox"/> (B) </div></div> <div><div><input type="checkbox"/> (C) </div><div><input type="checkbox"/> (D) </div><div><input type="checkbox"/> (E) </div></div>		Sign Blades	 <p>Hardware Set OZHRH03 (Set of 4 for mounting 2 sign brackets to post)</p>	Hardware Set
<div><div><p>30" x 30" STOP Sign S3030R11HA HIP Sheeting</p></div><div><p>36" x 36" x 36" YIELD Sign S3636R12HA HIP Sheeting</p></div><div><p>30" x 30" Warning Sign S3030(XXX)HA HIP Sheeting <i>*Specify Legend</i></p></div><div><p>24" x 30" SPEED LIMIT Sign S2430R21(XX)HA HIP Sheeting <i>*Specify Speed</i></p></div><div><p>12" x 18" Parking Sign S1218(XXX)HA HIP Sheeting <i>*Specify Legend</i></p></div></div>			Traffic Signs	 <p>U-Bolt Clamps OTSBR3UBCLAMP3BK (Set of 2 included in each package for mounting traffic sign to post)</p>	U-Bolt Clamps		
<div><div><p>30" x 30" Steel Frame OTSBF30300BK</p></div><div><p>36" x 36" x 36" Steel Frame OTSBF3636TBK</p></div><div><p>30" x 30" Steel Frame OTSBF3030DBK</p></div><div><p>24" x 30" Steel Frame OTSBF2430BK</p></div><div><p>12" x 18" Steel Frame OTSBF1218BK</p></div></div>			Traffic Sign Frames	<div><p>RH141HEXSETTER Driver For Self-Tapping Screws</p></div> <div><p>RHBSKT100 Allen Wrench Tool For Set Screws</p></div> <div><p>Torx Head Screw Bit RHBTHB14</p></div> <p>Extension RHBTHB3</p> <p>Installation Tools SOLD Separately</p>			

EASY ORDER CHECKLIST



THE CLARKSDALE STREET NAME SYSTEM



STEP 1 Choose 3" OD Post Style:



☐ Smooth Finish Steel Post



☐ Fluted Finish Aluminum Post



STEP 5 Choose Post Closure Cap:

QTY: _____ Closure Cap

☐ NONE



OPOZFR3CPCLCAP30BK
for 3" Round Post

Use Closure Caps on Post Systems with Traffic signs only. Closure Caps are NOT needed when a street name sign bracket from Step 6 is used with a street name sign.



STEP 2 Choose Post Lengths & Qtys:

QTY: _____ 10' QTY: _____ 12' QTY: _____ 14'

MUTCD Guidance: When not using a breakaway anchor, posts should be embedded in concrete and buried 2ft in the ground. Proper Mounting height is 7ft from the bottom of sign to the road surface.



STEP 3 Choose Breakaway Systems & Qtys:

QTY: _____ Concrete Surface Mount

QTY: _____ V-Loc: Soft Soil

QTY: _____ V-Loc: Existing Concrete

QTY: _____ V-Loc: New Concrete

QTY: _____ Non-Breakaway Anchor Plate ☐ None



STEP 4 Choose Base Style for ALL Posts:

☐ 9993- 27" ☐ SB-33- 24" ☐ 8397- 8.5" ☐ None

NOTE: Posts must be ordered separately.



◆ 8397: 8½" Tall Base:
Attach directly to a 3" round post with 3 set screws, included.



OPOZBR38397ABK

◆ 9993: 27" Tall Aluminum Base
Easy to install. This base clamshells around new or existing poles and lock together using steel fasteners. Tightens to the post with 2 set screws, included.



◆ SB-33: 24" Tall Aluminum Base
Easy to install. This base clamshells around new or existing poles and lock together using steel fasteners.

OPOZBR39993BK

OPOZBR3SB33BK



STEP 6 Choose Sign Blades & Bracket Qtys:



QTY: _____ 30" Sign Blades

◆ For use on low volume roads with Speed Limits 25 MPH or less

◆ 4" Letter Height *minimum*

5½" Premium Brackets

◆ For use with 30" Blades



QTY: _____
OSIZ1R3P993FBK
3" OD Round Post Cap



QTY: _____
OSIZ1CRP990FBK
Crosspiece

Sizes follow the guidelines in the MUTCD (Manual on Uniform Traffic Control Devices), the national standard used for all roads, including private roads open to public travel.



QTY: _____ 36" Sign Blades

◆ For use on higher volume, conventional roads with Speed Limits over 25 MPH

◆ 6" Letter Height *minimum*

12" Jumbo Brackets

◆ For use with 36" Blades



QTY: _____
OSIZ1R3J412RFBK
3" OD Round Post Cap



QTY: _____
OSIZ1CRJ412CFBK
Crosspiece

12" Jumbo Brackets support the 36" sign blades created for the implementation of 6" copy on street name signs.



EASY ORDER CHECKLIST

The Clarksdale Street Name System is our most cost effective ornamental system. Utilize our tried and true modular components including 3" posts, post bases, post top brackets and finials to create a strong and reliable system. Powder coated semi-gloss black for an elegant look.



NOTE: All Signs come standard with High Intensity Prismatic (HIP) sheeting and as a Flat, Double-Faced Sign Blade, unless otherwise requested. **Please E-Mail this form, along with a typed list of street name signs desired, to sales@cpcsigns.com**
Example: 30" Sign Blades: Qty (2) Main St, Qty (4) Henderson Ct --- **36" Sign Blades:** Qty (1) Clarksdale Rd, Qty (3) Custom Ave



Choose Sign Style:

Standard ☐


Standard Dr

Add 317F Top Finial
to Standard Sign QTY: _____

OPOZF1317FBK



Deluxe (Routed Sign)



Choose Sign Color Scheme:

- ☐ White on Green
- ☐ White on Blue
- ☐ White on Brown
- ☐ Black on White
- ☐ White on Black
- ☐ Other/Custom _____

Custom Dr

Custom Dr

Custom Dr

Custom Dr

Custom Dr

MUTCD Guidance: Acceptable alternative background colors to Green are Blue, Brown or White. The legend shall be White, except for Black on White signs. Custom colors require adequate contrast.



Choose Sign Border Style:

- ☐ NONE
- ☐ Edge - Should use on dark backgrounds
- ☐ Inset - Should use on white backgrounds

MUTCD Guidance: Borders are optional, but if used, must be the same color as the letters.



Choose Font/Prefix/Suffix:

Letter Font

☐ Highway Gothic

☐ Custom Font _____

Prefix: ☐ Full Size ☐ Half Size

Suffix: ☐ Full Size ☐ Half Size

MUTCD Guidance: Street Name Signs shall be composed of a combination of upper and lower case letters.

MUTCD Guidance: Prefix/Suffix Height may be smaller than the height of the primary copy and may be abbreviated. No punctuation is to be used.



Choose Sign Hole Punch:

- ☐ NONE
- ☐ Vandal Resistant VPA12 Bolt thru



Choose Traffic Signs & Qtys:

QTY: _____ 30" STOP QTY: _____ 36" Yield

QTY: _____ 30" Warning _____

QTY: _____ Other _____ ☐ NONE



Choose Traffic Sign Backer Style:

- ☐ NONE
- ☐ Plate
- ☐ Frame
- ☐ Laminate



Choose Traffic Sign Hardware:

- ☐ U-Bolt Clamp
- ☐ NONE



(Set of 2) for 3" O.D. Post
OTSBR3UBCLAMP3BK



EASY ORDER CHECKLIST



THE NATCHEZ STREET NAME SYSTEM

STEP 1

Choose a 3" OD Post Style



☐ Smooth Finish Steel Post



☐ Fluted Finish Aluminum Post

STEP 2

Choose Post Lengths & Qty's:

QTY: 10'

QTY: 12'

QTY: 14'

MUTCD Guidance: When not using a breakaway anchor, posts should be embedded in concrete and buried 2ft in the ground. Proper Mounting height is 7ft foot from the bottom of sign to the road surface.

STEP 3

Choose Breakaway Systems & Qty's:

QTY: Concrete Surface Mount

QTY: V-Loc: Soft Soil

QTY: V-Loc: Existing Concrete

QTY: V-Loc: New Concrete

QTY: Non-Breakaway Anchor Plate ☐ None

STEP 4

Choose Base Style for ALL Posts:

☐ 9993- 27" ☐ SB-33- 24" ☐ 8397- 8.5" ☐ None

NOTE: Posts must be ordered separately.



◆ **8397: 8 1/2" Tall Base:**
Attach directly to a 3" round post with 3 set screws, included. OPOZBR38397ABK



◆ **9993: 27" Tall Aluminum Base**
Easy to install. This base clamshells around new or existing poles and lock together using steel fasteners. Tightens to the post with 2 set screws, included.

◆ **SB-33: 24" Tall Aluminum Base**
Easy to install. This base clamshells around new or existing poles and lock together using steel fasteners.

OPOZBR39993BK

OPOZBR3SB33BK



STEP 5

Choose Style for ALL Post Top Finals:



☐ Pineapple



☐ Spear



☐ Ball

OPOZFR3657MDBK

OPOZFR39516MDBK

OPOZFR3FINB3BK

◆ 3 black set screws to attach to the post are included.
The allen wrench to tighten set screws is NOT included.

STEP 6

Choose a Sign Blade Size:

QTY: 30" Sign Blades

QTY: 36" Sign Blades

◆ For use on low volume roads with Speed Limits 25 MPH or less



◆ 4" Letter Height minimum

◆ Use with Sign Arm or #800 Cantilever Wing Brackets

◆ For use on higher volume, conventional roads with Speed Limits over 25 MPH



◆ 6" Letter Height minimum

◆ Use with Sign Arm or #800 Cantilever Wing Brackets

Sizes follow the guidelines in the MUTCD (Manual on Uniform Traffic Control Devices), the national standard used for all roads, including private roads open to public travel.

STEP 7

Choose a Sign Bracket:

☐ #800 Cantilever Wing



OSIZ2UNCT800BK
24" Long

☐ Sign Arm



OSIZ2UNSA

NOTE: A bent lip sign style is required for use with a Sign Arm Bracket. A no lip sign style is required for use with Cantilever Wing Bracket.

EASY ORDER CHECKLIST

The Natchez Street Name System is the simplistic, sleek and modern version of our original Oxford System. Utilize our modular components including 3" posts, post bases, sleek sign arm brackets or metro wing brackets and finials to create your own modern system. Powder coated semi-gloss black for an elegant look.



NOTE: All Signs come standard with High Intensity Prismatic (HIP) sheeting and as a Flat, Double-Faced Sign Blade, unless otherwise requested. **Please E-Mail this form, along with a typed list of street name signs desired, to sales@cpcsigns.com**
Example: 30" Sign Blades: Qty (2) Main St, Qty (4) Henderson Ct --- **36" Sign Blades:** Qty (1) Clarksdale Rd, Qty (3) Custom Ave

STEP 8

Choose a Sign Style:

Standard ☐

Standard Dr

- ☐ bent lip
☐ no lip

Deluxe (Routed Sign)



STEP 9

Choose Sign Color Scheme:

- ☐ White on Green
☐ White on Blue
☐ White on Brown
☐ Black on White
☐ White on Black
☐ Other/Custom

Custom Dr

Custom Dr

Custom Dr

Custom Dr

Custom Dr

MUTCD Guidance: Acceptable alternative background colors to Green are Blue, Brown or White. The legend shall be White, except for Black on White signs. Custom colors require adequate contrast.

STEP 10

Choose Configuration:

☐ Offset

☐ Offset/Inverted



STEP 11

Choose Sign Border Style:

☐ NONE

☐ Edge - Use on dark backgrounds

☐ Inset - Use on white backgrounds

MUTCD Guidance: Borders are optional, but if used, must be the same color as the letters.

STEP 12

Choose Font/Prefix/Suffix:

Letter Font

☐ Highway Gothic

☐ Custom Font

MUTCD Guidance: Street Name Signs shall be composed of a combination of upper and lower case letters.

Prefix: ☐ Full Size ☐ Half Size

Suffix: ☐ Full Size ☐ Half Size

MUTCD Guidance: Prefix/Suffix Height may be smaller than the height of the primary copy and may be abbreviated. No punctuation is to be used.

STEP 13

Choose Traffic Signs & Qtys:

QTY: ___ 30" STOP QTY: ___ 36" Yield

QTY: ___ 30" Warning

QTY: ___ Other ☐ NONE



STEP 14

Choose Traffic Sign Backer Style:

☐ NONE

☐ Frame

☐ Plate

☐ Laminate



STEP 15

Choose Traffic Sign Hardware:

☐ U-Bolt Clamp

☐ NONE

(Set of 2) for 3" O.D. Post
 OTSBZR3UBCLAMP3BK



EASY ORDER CHECKLIST



THE VICKSBURG STREET NAME SYSTEM

STEP 1

Choose a 3" OD Post Style



☐ Smooth Finish Steel Post



☐ Fluted Finish Aluminum Post

STEP 2

Choose Post Lengths & Qtys:

QTY: 10' QTY: 12' QTY: 14'

MUTCD Guidance: When not using a breakaway anchor, posts should be embedded in concrete and buried 2ft in the ground. Proper Mounting height is 7ft foot from the bottom of sign to the road surface.

STEP 3

Choose Breakaway Systems & Qtys:

QTY: Concrete Surface Mount
QTY: V-Loc: Soft Soil
QTY: V-Loc: Existing Concrete
QTY: V-Loc: New Concrete
QTY: Non-Breakaway Anchor Plate ☐ None

STEP 4

Choose Base Style for ALL Posts:

☐ 9993-27" ☐ SB-33-24" ☐ 8397-8.5" ☐ None

NOTE: Posts *must* be ordered separately.



OPOZBR39993BK



OPOZBR3SB33BK

- ◆ 8397: 8½" Tall Base: Attach directly to a 3" round post with 3 set screws, included. OPOZBR38397ABK
- ◆ 9993: 27" Tall Aluminum Base Easy to install. This base clamshells around new or existing poles and lock together using steel fasteners. Tightens to the post with 2 set screws, included.
- ◆ SB-33: 24" Tall Aluminum Base Easy to install. This base clamshells around new or existing poles and lock together using steel fasteners.



STEP 5

Choose Style for ALL Post Top Finals:



☐ Pineapple

OPOZFR3657MDBK



☐ Spear

OPOZFR39516MDBK



☐ Ball

OPOZFR3FINB3BK

- ◆ 3 black set screws to attach to the post are included. The allen wrench to tighten set screws is NOT included.

STEP 6

Choose a Deluxe Logo Panel:

Logo Panel with Decorative Trim Bracket

☐ 6" x 6" ☐ 9" x 9" ☐ NONE

QTY:

QTY:



- ◆ Decorative Logo Trims hold double sided .080" aluminum flat logo signs without borders.

STEP 7

Choose Sign Color Scheme:

- ☐ White on Green
- ☐ White on Blue
- ☐ White on Brown
- ☐ Black on White
- ☐ White on Black
- ☐ Other/Custom

Custom Dr

Custom Dr

Custom Dr

Custom Dr

Custom Dr

MUTCD Guidance: Acceptable alternative background colors to Green are Blue, Brown or White. The legend shall be White, except for Black on White signs. Custom colors require adequate contrast.



EASY ORDER CHECKLIST

The Vicksburg Street Name System provides a unique and stark contrast to the other design options. This system utilizes modular components including 3" posts, post bases, wing mounted street name signs and logo panels mounted within decorative trim brackets. Powder coated semi-gloss black for an elegant look.



NOTE: All Signs come standard with High Intensity Prismatic (HIP) sheeting and as a Flat, Double-Faced Sign Blade, unless otherwise requested. **Please E-Mail this form, along with a typed list of street name signs desired, to sales@cpcsigns.com**
Example: 30" Sign Blades: Qty (2) Main St, Qty (4) Henderson Ct --- **36" Sign Blades:** Qty (1) Clarksdale Rd, Qty (3) Custom Ave



Choose Sign Blade/Bracket Size:

Sizes follow the guidelines in the MUTCD (Manual on Uniform Traffic Control Devices), the national standard used for all roads, including private roads open to public travel.



QTY: ____ 6" x 36" Sign Blade with Decorative Trim Bracket

- ◆ For use on low volume roads with Speed Limits 25 MPH or less
- ◆ 4" Letter Height *minimum*
- ◆ Accommodates longer street names than other custom street name systems



OSIZ3UNJTRIM36BK



QTY: ____ 9" x 36" Sign Blade with Decorative Trim Bracket

- ◆ For use on higher volume, conventional roads with Speed Limits over 25 MPH
- ◆ 6" Letter Height *minimum*



OSIZ3UNCTRIM36BK



QTY: ____ 9" x 42" Sign Blade

- ◆ For use on higher volume, conventional roads with Speed Limits over 25 MPH
- ◆ 6" Letter Height *minimum*
- ◆ Accommodates longer street names



OSIZ3UNCTRIM42BK



Choose Font/Prefix/Suffix:

Letter Font

☐ Highway Gothic

☐ Custom Font _____

Prefix: ☐ Full Size ☐ Half Size

Suffix: ☐ Full Size ☐ Half Size

MUTCD Guidance: Street Name Signs shall be composed of a combination of upper and lower case letters.

MUTCD Guidance: Prefix/Suffix Height may be smaller than the height of the primary copy and may be abbreviated. No punctuation is to be used.



Choose Traffic Signs & Qtys:

QTY: ____ 30" STOP QTY: ____ 36" Yield

QTY: ____ 30" Warning _____

QTY: ____ Other _____ ☐ NONE



Choose Traffic Sign Backer Style:

☐ NONE

☐ Frame

☐ Plate

☐ Laminate



Choose Traffic Sign Hardware:

☐ U-Bolt Clamp

☐ NONE



(Set of 2) for 3" O.D. Post
OTS5BZR3UBCLAMP3BK



EASY ORDER CHECKLIST



THE OXFORD STREET NAME SYSTEM

STEP 1

Choose a 3" OD Post Style



☐ Smooth Finish Steel Post



☐ Fluted Finish Aluminum Post

STEP 2

Choose Post Lengths & Qtys:

QTY: 10' QTY: 12' QTY: 14'

MUTCD Guidance: When not using a breakaway anchor, posts should be embedded in concrete and buried 2ft in the ground. Proper Mounting height is 7ft foot from the bottom of sign to the road surface.

STEP 3

Choose Breakaway Systems & Qtys:

QTY: Concrete Surface Mount
QTY: V-Loc: Soft Soil
QTY: V-Loc: Existing Concrete
QTY: V-Loc: New Concrete
QTY: Non-Breakaway Anchor Plate ☐ None

STEP 4

Choose Base Style for ALL Posts:

☐ 9993-27" ☐ SB-33-24" ☐ 8397-8.5" ☐ None

NOTE: Posts *must* be ordered separately.



◆ **8397: 8½" Tall Base:**
Attach directly to a 3" round post with 3 set screws, included. OPOZBR38397ABK



◆ **9993: 27" Tall Aluminum Base**
Easy to install. This base clamshells around new or existing poles and lock together using steel fasteners. Tightens to the post with 2 set screws, included.

◆ **SB-33: 24" Tall Aluminum Base**
Easy to install. This base clamshells around new or existing poles and lock together using steel fasteners.

OPOZBR39993BK OPOZBR3SB33BK



STEP 5

Choose Style for ALL Post Top Finals:



☐ Pineapple



☐ Spear



☐ Ball

OPOZFR3657MDBK

OPOZFR39516MDBK

OPOZFR3FINB3BK

◆ 3 black set screws to attach to the post are included.
The allen wrench to tighten set screws is NOT included.

STEP 6

Choose a Sign Blade Size:

QTY: 30" Sign Blades QTY: 36" Sign Blades

◆ For use on low volume roads with Speed Limits 25 MPH or less



◆ 4" Letter Height minimum

◆ Use with Dogwood -or- Scroll Ornamental Bracket

◆ For use on higher volume, conventional roads with Speed Limits over 25 MPH



◆ 6" Letter Height minimum

◆ Use with Dogwood -or- Scroll Ornamental Bracket

Sizes follow the guidelines in the MUTCD (Manual on Uniform Traffic Control Devices), the national standard used for all roads, including private roads open to public travel.

STEP 7

Choose a Sign Bracket:

☐ Dogwood

☐ Scroll



EASY ORDER CHECKLIST

The Oxford Street Name System is our original and most popular ornamental system. Utilize modular components including 3" posts, post bases, ornate welded cantilever wing brackets and finials to create a classic design. Powder coated semi-gloss black for an elegant look.



NOTE: All Signs come standard with High Intensity Prismatic (HIP) sheeting and as a Flat, Double-Faced Sign Blade, unless otherwise requested. Please E-Mail this form, along with a typed list of street name signs desired, to sales@cpcsigns.com
Example: 30" Sign Blades: Qty (2) Main St, Qty (4) Henderson Ct --- 36" Sign Blades: Qty (1) Clarksdale Rd, Qty (3) Custom Ave



Choose a Sign Style:

Standard ☐



Deluxe (Routed Sign)



Choose Sign Color Scheme:

- ☐ White on Green
- ☐ White on Blue
- ☐ White on Brown
- ☐ Black on White
- ☐ White on Black
- ☐ Other/Custom _____



MUTCD Guidance: Acceptable alternative background colors to Green are Blue, Brown or White. The legend shall be White, except for Black on White signs. Custom colors require adequate contrast.



Choose Configuration:

☐ Offset

☐ Offset/Inverted



Choose Sign Border Style:

☐ NONE

☐ Edge - Use on dark backgrounds

☐ Inset - Use on white backgrounds

MUTCD Guidance: Borders are optional, but if used, must be the same color as the letters.



Choose Font/Prefix/Suffix:

Letter Font

☐ Highway Gothic

☐ Custom Font _____

MUTCD Guidance: Street Name Signs shall be composed of a combination of upper and lower case letters.

Prefix: ☐ Full Size ☐ Half Size

Suffix: ☐ Full Size ☐ Half Size

MUTCD Guidance: Prefix/Suffix Height may be smaller than the height of the primary copy and may be abbreviated. No punctuation is to be used.



Choose Traffic Signs & Qtys:

QTY: _____ 30" STOP QTY: _____ 36" Yield

QTY: _____ 30" Warning _____

QTY: _____ Other _____ ☐ NONE



Choose Traffic Sign Backer Style:

☐ NONE

☐ Frame

☐ Plate

☐ Laminate



Choose Traffic Sign Hardware:

☐ U-Bolt Clamp

☐ NONE



(Set of 2) for 3" O.D. Post
 OTSBZR3UBCLAMP3BK

Round Post Caps & Finials

Sign Top Finial



Bracket Sign Top Adapter Cap
OSIZ1RADAPTER34
Adapts 4" Post to 3" Cap



Bracket Sign Top Adapter Cap
OSIZ1RADAPTER
Adapts 3" Post to 2-3/8" Cap

More Finial Styles Available,
Call for Details



Closure Cap
OPOZFR3CPLCAP30BK
for 3" Round Post



Ball FINR
OPOZFR3FINR3BK
for 3" Round Post



Spear
OPOZFR39516MDBK
for 3" Round Post



Pineapple
OPOZFR3657MDBK
for 3" Round Post



Ball FINB4
OPOZFR4FINB4BK
for 4" Round Post



Acorn FINA4
OPOZFR4FINA4BK
for 4" Round Post



Decorative Top Finial
OPOZF1317(F/X)BK

3" Round Post Bases

4" Round Post Bases



8397 Base - 8.5" H
OPOZBR38397ABK
for 3" Round Post



SB-23 - 4" H
OPOZBR3SB23BK
for 3" Round Post



SB-93 - 16" H
OPOZBR3SB93BK
for 3" Round Post



2PC3 - 24" H
OPOZBR32PC3BK
for 3" Round Post



SB-33 - 24" H
OPOZBR3SB33BK
for 3" Round Post



9993 - 27" H
OPOZBR39993BK
for 3" Round Post



SB-94 - 16" H
OPOZBR4SB94BK
for 4" Round Post



SB-24 - 3.5" H
OPOZBR4SB24BK
for 4" Round Post



SB-64 - 18" H
OPOZBR4SB64BK
for 4" Round Post



2PC4 - 24" H
OPOZBR42PC4BK
for 4" Round Post



SB-34 - 25" H
OPOZBR4SB34BK
for 4" Round Post

Bracket Hardware • Tools

Round Posts Sign Arm Brackets



Black Torx Head Screw
OZHRHBTH140
(For mounting bent lip
design street name signs
to sign arm brackets)




Torx Bit Extension
RHBTHB3 - 3.5"



Torx Head
Screw Bit
RHBTHB14



Universal Sign Arm with Lemon Drop Finial
OSIZ2UNSAJBK - 30" long
OSIZ2UNSACLDBK - 36" long

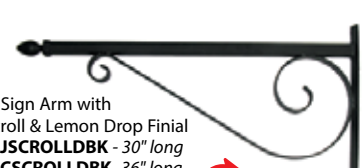

Universal Sign Arm with
Ornate Scroll & Lemon Drop Finial
OSIZ4UNJSCROLLDBK - 30" long
OSIZ4UNCSCROLLDBK - 36" long



Universal Sign Arm with
Ornate Dogwood & Lemon Drop Finial
OSIZ4UNJDOGWDLDBK - 30" long
OSIZ4UNCDOGWDLDBK - 36" long

Sign arm brackets require
"P" post hole punch pattern.



Hardware Sets

- OZHRH03** for Mounting 2 Sign Brackets to 3" Post
- OZHRH04** for Mounting 2 Sign Brackets to 4" Post
- OZHRH03L3** for Mounting Sign Trims Only to 3" Post
- OZHRH04L3** for Mounting Sign Trims Only to 4" Post

Trim Brackets



Logo Trim Bracket
OSIZ3UNJTRIMLOGOBK - 6" x 6"
OSIZ3UNCTRIMLOGOBK - 9" x 9"



Sign Trim Bracket
OSIZ3UNJTRIM36BK - 6" x 36"
OSIZ3UNCTRIM36BK - 9" x 36"
OSIZ3UNCTRIM42BK - 9" x 42"

Post hole punch patterns required: Use "P3" for 6" trims and "P" for 9" trims.

2 3/8" Smooth Round Posts



POZ-LOC® Socket System - a simple, cost effective way to install small signs without digging, concrete, threading, or nuts and bolts. Simple to use, a socket assembly includes a 27" socket & wedge. *Post is not included.*

RPORZPOZLOCSW for 2 3/8" O.D. Post



Black Powder Coated
Galvanized Steel Post

2 3/8" Round

ITEM CODE	Length	Gauge
OPOZARPORG10BK	10' (120")	16 Gauge
OPOZARPORG12BK	12' (144")	16 Gauge

- ◆ 2 3/8" O.D. Round galvanized steel posts available in 10' and 12' lengths
- ◆ Wall thickness is .065" (16 gauge)

NOTE: THESE POSTS MUST SHIP TRUCK LINE.



Premium Brackets

5 1/2" slot includes hardware for sign blades.



OSIZ1CRP990(F/X)BK
Crosspiece



OSIZ1CRP457(F/X)BK
45° Universal



OSIZ1R238P922(F/X)BK
2 3/8" OD Round Post Cap



OSIZ1CRJ412C(F/X)BK
Crosspiece



Post Cap
OSIZ1R238J412R(F/X)BK
for 2 3/8" Round Post

Brackets & Clamps



(Set of 2)
Back to Back Bracket
OTSBR238PPBZB832BK
for 2 3/8" O.D. Post



(Set of 2)
Single Bracket
OTSBR238Z238BK
for 2 3/8" O.D. Post



(Set of 2) U-Bolt Clamps
OTSBR238UBCLAMPBK
for Single Bracket



Decorative Top Sign Finial
OPOZF1317(F/X)BK



Bracket Hardware • Tools



Black Stainless Steel Set Screw
OZHRHBSK56BLACK - single
OZHRHBSK56BLACKPK - 3 pack



RHBSSKT100
Allen Wrench Tool
For Set Screws



RHBSSKF100
Allen Wrench Tool
For Set Screws



Closure Cap
OPOZFR238CPCCLAPBK
for 2 3/8" Round Post



Dome Cap
OPOZFR238CPCDC250BK
for 2 3/8" Round Post

Wing Brackets



Bell Wing Bracket
OSIZ2UNPCTBW12BK - 12" Long
(Requires single strap)
OSIZ2UNPCTBW18BK - 18" Long
OSIZ2UNPCTBW24BK - 24" Long
Sign attaches with 5/16" bolts.
Hardware NOT Included.


Wing Bracket
OSIZ2UNPCT4BK
4.5" x 2.5"



OSIZ2UNCT800BK
24" Long



OSIZ2UNCT8BK
14.4" Long

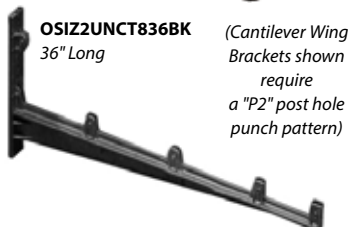

OSIZ2UNCT836BK
36" Long

(Cantilever Wing Brackets shown require a "P2" post hole punch pattern)



OSIZ2UNCT830BK
30" Long



BA080APLATE238
Fits 2 3/8" - 3" Diameter Posts
7.75" X 6.0"
0.3 Lbs Net Wt.

Solve your round post anchoring problem with these anchor plates designed to keep post from turning and reducing the need for concrete.

RH141HEXSETTER
Driver For Screws

RH141HEX
Self Tapping Metal Screw
(2 Required)



Round Post Anchor Plate

U-Channel Posts & Accessories

Sign Saver

Place between sign and post and sign will not bend from over tightening.

BA080SAVER



NOTE: POSTS TALLER THAN 8' MUST SHIP TRUCK LINE.

* Base Posts for Breakaway Feature



ITEM CODE	Length	Weight
RPOCG0352*	3.5FT	2LB
OPOZARPOCP062BK	6FT	2LB
OPOZARPOCP082BK	8FT	2LB
OPOZARPOCP102BK	10FT	2LB
OPOZARPOCP122BK	12FT	2LB
OPOZARPOCP123BK	12FT	3LB

BA080APLATEUCH

Anchor Plate

Galvanized anchor plate keeps post firmly in place.

- Manufactured from high tensile steel.
- Punched full length with 3/8" holes on 1" centers.
- Black powder coat over a galvanized finish.
- Measured by length and pounds per foot.


U-Channel Break-A-Way Systems



Safety Splice System



- Ingeniously simple design by Chicago Heights Steel.
- FHWA & AASHTO approved.
- Posts to 4 lbs.
- Two special bolts & spacers join base post to top post.



RPOCZSAFETYSPLICE for 1-2 1/2 lb posts
RPOCZSAFETYSPLICE3 for 3-4 lb posts



Lap Splice System

- Economical breakaway system by Marion Steel.
- FHWA & AASHTO approved.
- Posts to 4 lbs.
- Two special bolts & spacers join base post to top post.

RPOCZLAPSPLICE Silver for 2-2 1/2 lb posts 3/8" x 3/4" x 5"
RPOCZLAPSPLICEG Gold for 3-4 lb posts 1/2" x 3/4" x 5"

U-Channel Post Hardware

Vandal Proof System



RHBS1625OW
One-Way
Tamper Bolt
5/16" x 2 1/2"



RHW516NYLON
5/16" Nylon Washer



RHBS1625C
5/16" x 2 1/2"
RHBS1630CAT
5/16" x 3"
Zinc Carriage Bolt



RHN516VPA - Econo
5/16" Breakaway
Vandal Proof Nut



RHN516VPAPREMIUM
5/16" Breakaway
Vandal Proof Nut
Made In The U.S.A.

Special System



RHN516FLUTEDA
5/16" Fluted Tamper
Resistant Nut



RHTN31
5/16" Tufnut



RHW516
5/16" Zinc Washer



RHN516FLUTEDT2
Tool For Fluted Nut

Standard System



RHW516NYLON
5/16" Nylon Washer



RHW516LOC
5/16" Zinc Lock Washer



RHBS1625H
Zinc Hex Bolt
5/16" x 2 1/2"



RHN516
5/16" Zinc Nut

Sign Top Finial

OPOZF1317(F/X)BK
Decorative Sign Top Finial



Premium Brackets

5 1/2" slot includes hardware for sign blades.



OSIZ1CRP990(F/X)BK
Crosspiece



OSIZ1U180P91U(F/X)NUBK
180° U-Channel Cap



OSIZ1CRP457(F/X)BK
45° Universal



OSIZ1U90P91U(F/X)OLBK
90° U-Channel Cap

12" Jumbo Brackets



OSIZ1CRJ412C(F/X)BK
Crosspiece



OSIZ1U90J412U(F/X)OLBK
90° U-Channel Cap



OSIZ1U180J412U(F/X)NUBK
180° U-Channel Cap

Cherry-Mate Rivets & Rivet Gun



RHRBALM8BP18
1.12# U-Channel Post

RHRBALM8BP26
2# U-Channel Post

RHRBALM8BP34
3-4# U-Channel Post

RHRBALMGUN
Rivet Gun

Bracket Hardware • Tools



Black Stainless Steel Set Screw
OZHRHBSSK56BLACK - single
OZHRHBSSK56BLACKPK - 3 pack



RHBSSKT100
Allen Wrench Tool
For Set Screws



RHBSSKF100
Allen Wrench Tool
For Set Screws

Punched Square Posts, Hardware & Break-A-Way Systems

Black Powder Coated

Galvanized Steel Post

Galvanized Steel

Base Post / Sleeves

1.75" Square Punched			
Punched full length with 7/16" holes on 1" centers.			
ITEM CODE		Length	Gauge
OPOZARPOSG0814175		8' (96")	14 Gauge
OPOZARPOSG1014175		10' (120")	14 Gauge
OPOZARPOSG1214175		12' (144")	14 Gauge
2" Square Punched			
ITEM CODE		Length	Gauge
OPOZARPOSG08142		8' (96")	14 Gauge
OPOZARPOSG10142		10' (120")	14 Gauge
OPOZARPOSG12142		12' (144")	14 Gauge
Square Punched			
Punched full length with 7/16" holes on 1" centers.			
ITEM CODE	Size	Length	Gauge
RPOSG03122	2.00"	3' (36")	12 Gauge
RPOSG0312225	2.25"	3' (36")	12 Gauge
RPOSG0151225	2.50"	1.5' (18")	12 Gauge
RPOSG025122	2.00"	2.5' (30")	12 Gauge
RPOSG035122	2.00"	3.5' (42")	12 Gauge



NOTE: POSTS TALLER THAN 8' MUST SHIP TRUCK LINE.

- ◆ Superior torsional strength with easy, safe installation by hand or with power equipment.
- ◆ Convenient sign mounting before installation.
- ◆ Versatile, 4-sided sign mounting, at any height.
- ◆ Fast and economical replacement of damaged posts.
- ◆ Re-usable materials.
- ◆ FHWA-approved yielding capability.

Breakaway Anchor Installation

A POZ-LOC® Performance Post anchor can be driven into the ground first, allowing crews to work at ground level for quicker, cost-effective installations or replacement of damaged sign posts.



RHBCORNERBOLT25
includes jam nut

Corner bolt to mount top post to base post, up to 2.5"

Super-Lok Premium Brackets

SUPER-LOK Premium Brackets - 5 1/2" slot includes hardware for sign blades.



OSIZ1CRP990(F/X)BK
Crosspiece



OSIZ1CRP457(F/X)BK
45° Universal



OSIZ1S175P97(F/X)BK
1.75" Square Post Cap
OSIZ1S2P97(F/X)BK
2" Square Post Cap



OSIZ1WDP827(F/X)BK
4" x 4" Wood Post



Pyramid Cap
OPOZFS175CPPCAPBK
for 1.75" Square Post
OPOZFS2CPPCAPBK
for 2" Square Post

12" Jumbo Brackets



OSIZ1CRJ412C(F/X)BK
Crosspiece



OSIZ1S175J412SQ(F/X)BK
1.75" Square Post Cap
OSIZ1S2J412SQ(F/X)BK
2" Square Post Cap



Black Stainless Steel Set Screw
OZHRHBSSK56BLACK - single
OZHRHBSSK56BLACKPK - 3 pack



RHBSSKT100
Allen Wrench Tool
For Set Screws



RHBSSKF100
Allen Wrench Tool
For Set Screws

Cherry-Mate Rivets & Rivet Gun




RHRBALM8BP26
for 1.5" Square Post
RHRBALM8BP34
for 2" Square Post



RHRBALMGUN
Rivet Gun

Square Post Anchor Plate

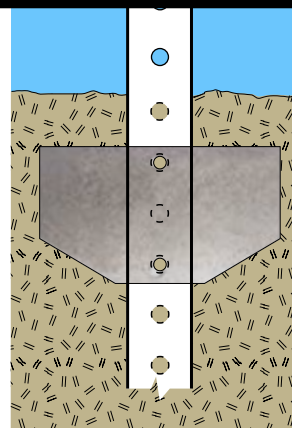

Anchor Plate

Galvanized anchor plate keeps square post firmly in place.

BA080APLATEUCH
7" x 4" | 0.5 Lbs Net Wt.

3" & 4" Smooth Square Posts

3" Square Smooth		
(XX) No Holes (P0) or 8 Holes* = (P) (P2) (P3)		
ITEM CODE	Length	Wall Thickness
OPOS3A10125BK(XX)	10' (120")	.125"
OPOS3A12125BK(XX)	12' (144")	.125"
OPOS3A14125BK(XX)	14' (168")	.125"
4" Square Smooth		
ITEM CODE	Length	Wall Thickness
OPOS4A10125BK(XX)	10' (120")	.125"
OPOS4A12125BK(XX)	12' (144")	.125"
OPOS4A14125BK(XX)	14' (168")	.125"



3" Square Smooth		
(XX) No Holes (P0) or 8 Holes* = (P) (P2) (P3)		
ITEM CODE	Length	Gauge
OPOS3S1014BK(XX)	10' (120")	14 Gauge
OPOS3S1214BK(XX)	12' (144")	14 Gauge
OPOS3S1414BK(XX)	14' (168")	14 Gauge
4" Square Smooth		
ITEM CODE	Length	Gauge
OPOS4S1011BK(XX)	10' (120")	11 Gauge
OPOS4S1211BK(XX)	12' (144")	11 Gauge
OPOS4S1411BK(XX)	14' (168")	11 Gauge

NOTE: POSTS TALLER THAN 8' MUST SHIP TRUCK LINE. *Call Customer Service for sign bracket pre-punched hole compatibility information.

Wing Brackets



Bell Wing Bracket
OSIZ2UNPCTBW12BK - 12" Long
 (Requires single strap)
OSIZ2UNPCTBW18BK - 18" Long
OSIZ2UNPCTBW24BK - 24" Long
 Sign attaches with 5/16" bolts.
 Hardware NOT Included.



Wing Bracket
OSIZ2UNPCT4BK
 4.5" x 2.5"



OSIZ2UNCT8BK
 14.4" Long

OSIZ2UNCT830BK
 30" Long

OSIZ2UNCT836BK
 36" Long



OSIZ2UNCT800BK
 24" Long

(Cantilever Wing Brackets shown require a "P2" post hole punch pattern)

3" & 4" Square Post Caps & Bases



Cap FINQC
OPOZFS3FINQC3BK
 for 3" Square Post
OPOZFS4FINQC4BK
 for 4" Square Post



End Cap FINQE
OPOZFS3FINQE3BK
 for 3" Square Post
OPOZFS4FINQE4BK
 for 4" Square Post



Base SBQ
OPOZBS3SBQ13BK - 3" H
 for 3" Square Post
OPOZBS4SBQ14BK - 3.5" H
 for 4" Square Post



FINQ-P4
OPOZFS4FINQP4BK
 for 4" Square Post



Ball FINQ-B4
OPOZFS4FINQB4BK
 for 4" Square Post



Base 2PCQ4 - 20" H
OPOZBS42PCQ4BK
 for 4" Square Post

Bracket Hardware • Tools




Black Torx Head Screw
OZHRHBTH140
 (For mounting bent lip design street name signs to sign arm brackets)



Torx Head Screw Bit
RHBTHB14

Torx Head Bit Extension
RHBTHB3 - 3.5"

Smooth Square Posts Sign Arm Brackets

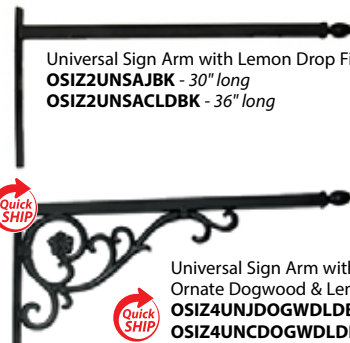

Universal Sign Arm with Lemon Drop Finial
OSIZ2UNSAJBK - 30" long
OSIZ2UNSACLDBK - 36" long



Universal Sign Arm with Ornate Scroll & Lemon Drop Finial
OSIZ4UNJSCROLLDBK - 30" long
OSIZ4UNCSCROLLDBK - 36" long



Universal Sign Arm with Ornate Dogwood & Lemon Drop Finial
OSIZ4UNJDOGWDLDBK - 30" long
OSIZ4UNCDOGWDLDBK - 36" long

Sign arm brackets require "P" post hole punch pattern.

Trim Brackets



Logo Trim Bracket
OSIZ3UNJTRIMLOGOBK - 6" x 6"
OSIZ3UNCTRIMLOGOBK - 9" x 9"



Sign Trim Bracket
OSIZ3UNJTRIM36BK - 6" x 36"
OSIZ3UNCTRIM36BK - 9" x 36"
OSIZ3UNCTRIM42BK - 9" x 42"

Post hole punch patterns required: Use "P3" for 6" trims and "P" for 9" trims.

Hardware Sets

OZHRH03 for Mounting 2 Sign Brackets to 3" Post
OZHRH04 for Mounting 2 Sign Brackets to 4" Post
OZHRH03L3 for Mounting Sign Trims Only to 3" Post
OZHRH04L3 for Mounting Sign Trims Only to 4" Post


Street Name Finished Signs & Blanks

Finished Signs


- Doubled-Sided
- Standard/Custom Color
- Custom Text & Font
- White HIP • **Bent Lip**



OSI41001CHWH - 36" x 13.5"
OSI41001JHWH - 30" x 11"

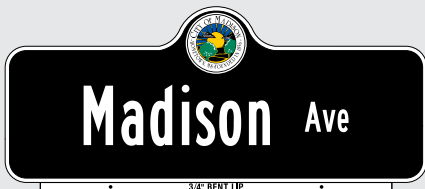

OSI41016CHWH - 36" x 15"
OSI41016JHWH - 30" x 11.82"

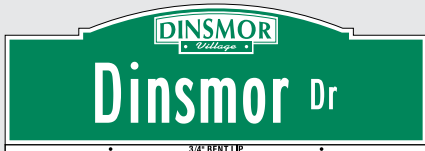

OSI41003CHWH - 36" x 12"
OSI41003JHWH - 30" x 9.25"



OSI41004CHWH - 36" x 14.25"
OSI41004JHWH - 30" x 11.5"



OSI41025CHWH - 36" x 12"
OSI41025JHWH - 30" x 10"

Finished Signs


- Doubled-Sided
- Standard/Custom Color
- Custom Text & Font
- White HIP • **NO Lip**



OSI11001CHWH - 36" x 13.5"
OSI11001JHWH - 30" x 11"



OSI11016CHWH - 36" x 15"
OSI11016JHWH - 30" x 11.82"

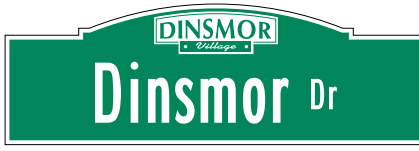

OSI11003CHWH - 36" x 12"
OSI11003JHWH - 30" x 9.25"



OSI11004CHWH - 36" x 14.25"
OSI11004JHWH - 30" x 11.5"



OSI3CLOGOHHW - 9" x 9"
OSI3JLOGOHHW - 6" x 6"


Logo Signs

Sheeted Reflective Blanks


- Doubled-Sided
- White HIP • **Bent Lip**




OSIS41001CHWH - 36" x 13.5"
OSIS41001JHWH - 30" x 11"

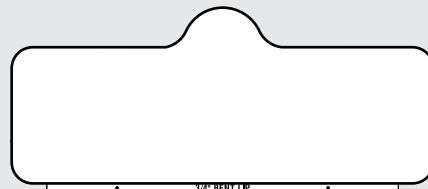

OSIS41016CHWH - 36" x 15"
OSIS41016JHWH - 30" x 11.82"

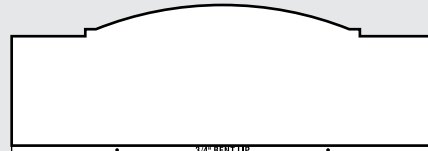

OSIS41003CHWH - 36" x 12"
OSIS41003JHWH - 30" x 9.25"

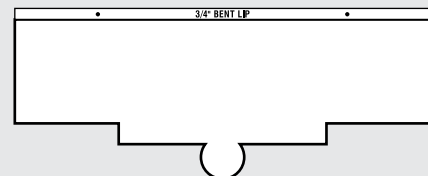

OSIS41004CHWH - 36" x 14.25"
OSIS41004JHWH - 30" x 11.5"



OSIS41025CHWH - 36" x 12"
OSIS41025JHWH - 30" x 10"



Federal Standard Finished Signs • Letters: B Series or largest Highway Gothic Font Series that space allows on sign • Doubled-Sided • No Holes • No Border • White HIP • **NO Lip** **M2AH(X)D(XXXX)(R)BM(XX)N**

Overlay Film Color: (X) =



Blade Size: (XXXX) = (0942) 42" x 9" | (0936) 36" x 9" | (0630) 30" x 6" | (0636) 36" x 6"

Corner Radius: (R) = (T) 1.5" Radius for 9" Sign Trim Brackets | (S) .75" Radius for all other brackets


Letter Height: (XX) = (63) 6" Primary & 3" Prefix/Suffix for 9" Signs | (42) 4" Primary & 2" Prefix/Suffix for 6" Signs




Street Name Finished Signs & Blanks

Sheeted Reflective Blanks


- Doubled-Sided
- White HIP • **NO Lip**

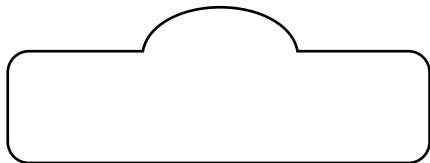


OSIS11001CHWH - 36" x 13.5"
OSIS11001JHWH - 30" x 11"

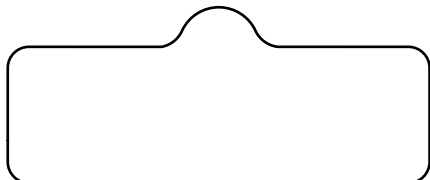

OSIS11016CHWH - 36" x 15"
OSIS11016JHWH - 30" x 11.82"

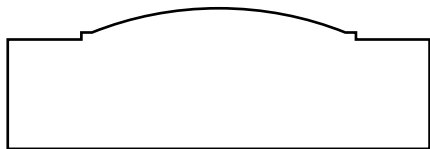

OSIS11003CHWH - 36" x 12"
OSIS11003JHWH - 30" x 9.25"

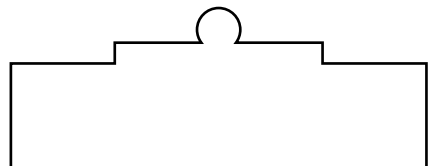

OSIS11004CHWH - 36" x 14.25"
OSIS11004JHWH - 30" x 11.5"



BA080HWH1236SNSRD - 36" x 12"
BA080HWH0936SNSRD - 36" x 9"
BA080HWH0630SNSRD - 30" x 6"



Use below items in 9" trim sign bracket


BA080HWH0936SNSRD15 - 36" x 9"
BA080HWH0942SNSRD15 - 42" x 9"

Bare Blanks

- **Bent Lip**




OSIB41001C - 36" x 13.5"
OSIB41001J - 30" x 11"

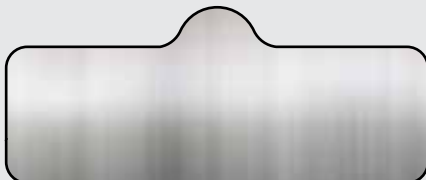

OSIB41016C - 36" x 15"
OSIB41016J - 30" x 11.82"



OSIB41003C - 36" x 12"
OSIB41003J - 30" x 9.25"

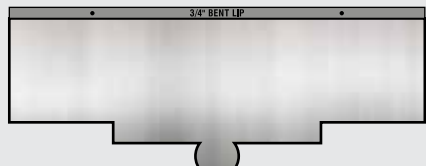

OSIB41004C - 36" x 14.25"
OSIB41004J - 30" x 11.5"



OSIB41025C - 36" x 12"
OSIB41025J - 30" x 10"




Bare Blanks


- **No Lip**




OSIB11001C - 36" x 13.5"
OSIB11001J - 30" x 11"

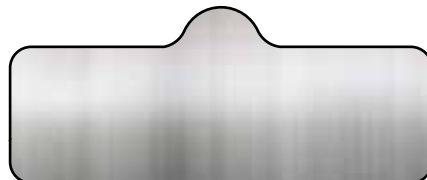

OSIB11016C - 36" x 15"
OSIB11016J - 30" x 11.82"

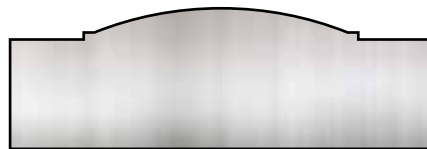

OSIB11003C - 36" x 12"
OSIB11003J - 30" x 9.25"

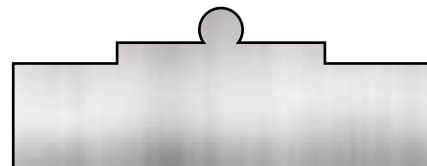

OSIB11004C - 36" x 14.25"
OSIB11004J - 30" x 11.5"



BA0801236SNSR - 36" x 12"
BA0800936SNSR - 36" x 9"
BA0800630SNSR - 30" x 6"



Use below items in 9" trim sign bracket

BA0800936SNSR15 - 36" x 9"
BA0800942SNSR15 - 42" x 9"




The use of 3M's Matched Component System insures your investment. When signs are created with high quality 3M sheeting and components, the sign performance is backed by 3M warranties.


The MCS guarantees that signs will remain effective for their intended use and meet minimum values for retroreflection for the specified warranty period. The use of any non-3M materials in conjunction with 3M products will void all warranties.

Custom Branding Options


Matching custom branded signage is available for parking facilities, parking areas, businesses, buildings and entrances. Also available are custom branded guide signage including wayfinding, metro street name signs, city entrance guide signs and ground mounted street name signs.

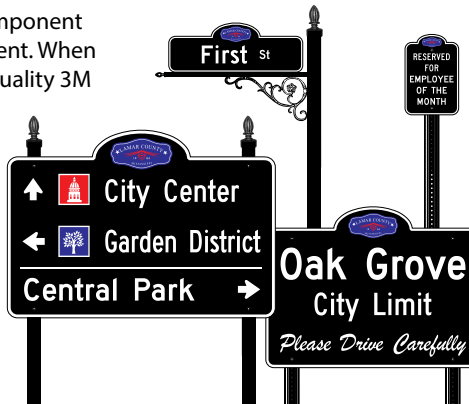

Traffic Sign Backers



Laminate Vinyl offers the most cost effective option while retaining the classic feel of the ornamental system. Durable black vinyl is applied to the back of the traffic sign. This option is not visible from the front side of the sign.



.080 Aluminum Plates offer a lighter weight alternative to Steel Frames while retaining the classic feel of the ornamental system. Oversized by 3" for a defined 1.5" black border around the sign. Punched and radius to match sign. Powder coated semi-gloss black.



Steel Sign Frames include a steel backer plate welded to angle iron. Frames have a .75" radius and standard .375" holes to match the sign. Powder coated semi-gloss black.



ITEM CODE			FOR SIZES
Laminate Vinyl	Aluminum Plate	Steel Frame	
OTSBL1206BK	OTSBP1206BK	OTSBF1206BK	12" X 6" Horizontal Rectangle
OTSBL1806BK	OTSBP1806BK	OTSBF1806BK	18" X 6" Horizontal Rectangle
OTSBL1218BK	OTSBP1218BK	OTSBF1218BK	12" X 18" Vertical Rectangle
	OTSBP1812BK	OTSBF1812BK	18" X 12" Horizontal Rectangle
OTSBL1824BK	OTSBP1824BK	OTSBF1824BK	18" X 24" Vertical Rectangle
	OTSBP2418BK	OTSBF2418BK	24" X 18" Horizontal Rectangle
OTSBL2424BK	OTSBP2424DBK	OTSBF2424DBK	24" X 24" Diamond
	OTSBP2424OBK	OTSBF2424OBK	24" X 24" Octagon
	OTSBP2424SBK	OTSBF2424SBK	24" X 24" Square
OTSBL2430BK	OTSBP2430BK	OTSBF2430BK	24" X 30" Vertical Rectangle
OTSBL3030BK	OTSBP3030DBK	OTSBF3030DBK	30" X 30" Diamond
	OTSBP3030OBK	OTSBF3030OBK	30" X 30" Octagon
	OTSBP3030SBK	OTSBF3030SBK	30" X 30" Square
OTSBL3636BK	OTSBP3636DBK	OTSBF3636DBK	36" X 36" Diamond
	OTSBP3636OBK	OTSBF3636OBK	36" X 36" Octagon
	OTSBP3636SBK	OTSBF3636SBK	36" X 36" Square
	OTSBP3636TBK	OTSBF3636TBK	36" X 36" Triangle



Stainless Steel Strapping Kits & Tools

Buckle Bracket Kit



BACK



FRONT

OZHRHSSB7BK

Each kit contains everything needed, including hardware, to mount 1 sign to a post that is 4" - 12" in diameter.

Build Your Own Kit

Screw type hose clamp style for sign mounting. Needs only a screwdriver to tighten.



OZHRHSLA07BK Snap Lock Assembly
22" strap fits post up to 7" in Diameter

OZHRHSLA10BK Snap Lock Assembly
31" strap fits post up to 10" in Diameter

OZHRHSLA1225BK Snap Lock Assembly
38" strap fits post up to 12.25" in Diameter



OZHRHSS1230BK 1/2"x.030"x100'
OZHRHSS3430BK 3/4"x.030"x100'
Black Stainless Steel Strapping

OZHRHSS3430BU3465BK
3/4"x.030 "x39"
Black Stainless Steel Strapping
with buckle



CHOOSE
Stainless Steel
Bracket and **ADD**
Nuts & Bolts to
attach signs.

*2 brackets needed to
mount 1 sign to a post.



OZHRHSSBPLUS4BK
Plus 4 Sign Bracket
For Posts Over 4" in
Outside Diameter



OZHRHSSBMINUS4BK
Minus 4 Sign Bracket
For Posts Under 4" in
Outside Diameter



RHSSHBS16
5/16" x 18 x 3/4"
Stainless Steel Bolt
(Just the right length to
fit the threaded PLUS 4 or
Minus 4 Bracket)



OZHRHSSHWS06BK
Wing Seal for 3/4"
wide x .025" or
thinner strapping



RHSSHN8
5/16" Stainless Steel Nut
(Only required
for cantilever)

OZHRHSSHWS05BK
Wing Seal for 1/2"
x .025" or thinner
strapping



OZHRHSSHBU3465BK
Buckle for 3/4" wide
x .030" or thicker
strapping

OZHRHSSHBU1265BK
Buckle for 1/2" wide
x .030" or thicker
strapping

Strapping Tools



RHSSTMODELCP1
Strap Cutter



RHSSTMODELCP001
Spinner Type Strapping Tool



All traffic signs represented here are made with High Intensity Prismatic Reflective sheeting which conveys a 10 year warranty and meets the US DOTs stringent 2009 standards with regard to reflectivity and minimum size of signs. Shown below are the most common traffic sign sizes and legends. See pages 3-12 for more options. Non Standard Legend Signs also available.



Turn Left
S3030W11L(H/A)



Turn Right
S3030W11R(H/A)



Curve Left
S3030W12L(H/A)



Curve Right
S3030W12R(H/A)



Side Road
S3030W22(H/A)



T Intersection
S3030W24(H/A)



Crossroad
S3030W21(H/A)



Stop Ahead
S3030W31(H/A)



Reverse Turn Left
S3030W13L(H/A)



Reverse Turn Right
S3030W13R(H/A)



Winding Road Left
S3030W15L(H/A)



Winding Road Right
S3030W15R(H/A)



Speed Hump
S3030W171(H/A)



Bump
S3030W81(H/A)



Dip
S3030W82(H/A)



Yield Ahead
S3030W32(H/A)



Dead End
S3030W141(H/A)



Equestrian Traffic
S3030W117(H/A)



Pedestrian Traffic
S3030W112(H/A)



Road Narrows
S3030W51(H/A)



Road Closed
S3030W203R(H/A)



Slow
S3030W402(H/A)



Circular Intersection
S3030W26(H/A)



Signal Ahead
S3030W33(H/A)



No Outlet
S3030W142(H/A)



Slow Children at Play
S3030W422(H/A)



Children at Play
S3030W423(H/A)



S1824W421(H/A)



S1824PC135(H/A)



S1824W18(H/A)
S2430W18(H/A)



S3612R61R(H/A)



S3612R61L(H/A)



S1218PC105(H/A)



S1218R83A(H/A)
S1824R83A(H/A)



S1218R7200(H/A)



S1218R71(H/A)



S1218R71D(H/A)



S1218R7213(H/A)



S1218R7326(H/A)



S1218R7330(H/A)



S1218R161(H/A)
S1824R161(H/A)



S1218R7406(H/A)



S1824R2105(H/A)
S2430R2105(H/A)



S1824R2110(H/A)
S2430R2110(H/A)



S1824R2115(H/A)
S2430R2115(H/A)



S1218R78(H/A)



S1218R78VA(H/A)



S1218R78D(H/A)



S1218R7500(H/A)



S1218R7504(H/A)



S1824R2120(H/A)
S2430R2120(H/A)



S1824R2125(H/A)
S2430R2125(H/A)



S1824R2130(H/A)
S2430R2130(H/A)



S3030R11(H/A)
S3636R11(H/A)
S4848R11(H/A)



S3030R12(H/A)



S3030R51(H/A)



S1824R62L(H/A)
S2430R62L(H/A)



S1824R62R(H/A)
S2430R62R(H/A)




S1824R2135(H/A)
S2430R2135(H/A)



S1824R2140(H/A)
S2430R2140(H/A)




S1824R2145(H/A)
S2430R2145(H/A)



Keep Left
S1824R48(H/A)
S2430R48(H/A)



Keep Left
S1824R48A(H/A)
S2430R48A(H/A)



Keep Right
S1824R47(H/A)
S2430R47(H/A)



Keep Right
S1824R47A(H/A)
S2430R47A(H/A)



S1824R109A(H/A)



S1824R109(H/A)

Metro Street Name Signs

Installation: Metro Street Name Signs are designed for overhead mast arm mounting with standard brackets.



A route symbol or a pictograph may be used on the left side of a street name sign.



Standard Finished Metro Signs

- Letters: B Series or largest Highway Gothic Font Series that space allows on sign
- Single-Sided • No Holes • White HIP




Did You Know?

Traffic & Custom Signs, both traditional and digitally printed are manufactured to the 3M Matched Component System standards.

The use of 3M's Matched Component System insures your investment. When signs are created with high quality 3M sheeting and components, the sign performance is backed by 3M warranties. The MCS guarantees that signs will remain effective for their intended use and meet minimum values for retroreflection for the specified warranty period. The use of any non-3M materials in conjunction with 3M products will void all warranties.

Standard Overlay Film Colors (shown below)

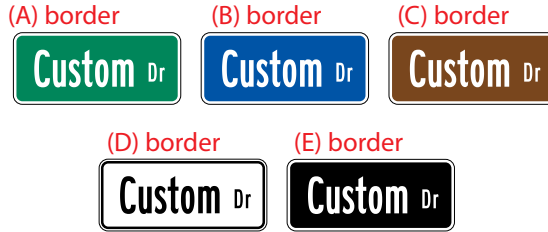

90" x 30" Sign Blades

Minimum of 8" upper/lower case letters. Fits only 1 line of copy. **OSI84(XXXX)M1HWH**



1025M1



1001M1



1003M1



1004M1



1016M1

90" x 36" Sign Blades

Minimum of 8" upper/lower case letters. Fits 2 lines of copy. **OSI84(XXXX)M2HWH**



1025M2



1001M2



1003M2




1004M2




1016M2

Metro Street Name Sign Backer

Laminate Vinyl Backer is a cost effective option for a classic feel of the ornamental system. Durable black vinyl is applied to the back of the metro street name sign. The vinyl is not visible from the front side of the sign.



OTSBL9030BK



OTSBL9036BK

Personalized Custom Signs

LEVEL 1:

Standard Shape with Custom Colors, Letter Fonts and Text.



LEVEL 2:

Standard Shape with Custom Colors, Letter Fonts, Text and Logo.



LEVEL 3:

Custom Shape with Custom Colors, Letter Fonts, Text and Logo.



Overhead Span Wire Mounting Brackets

MEDIUM-DUTY

OSIZ840HCOMM77BK



- ◆ Medium-Duty, made from plated steel and aluminum, powder coat painted semi-gloss black
- ◆ Swivels 360-degrees and adjusts for tilt.
- ◆ Mounts on cables up to 3/8"
- ◆ Pre-assembled for quick installation



BEST VALUE HEAVY-DUTY

OSIZ840HCPCSWINGBK



- ◆ Heavy-Duty, 4 and 8 gauge steel, powder coat painted semi-gloss black.
- ◆ 3-way adjustable, weight 4.8 lbs.
- ◆ Mounts on cables up to 3/8"
- ◆ Pre-assembled for quick, hassle free installation of metro street name signs.
- ◆ 2 brackets required for 90" & 96" signs with 12" inset distance from edge of sign.



Overhead Mast Arm Brackets

MEDIUM-DUTY

OSIZ840HCOM88BK




- ◆ Medium-Duty, made from plated steel and aluminum, powder coat painted semi-gloss black.
- ◆ Use black stainless steel strapping for mounting (sold separately)
- ◆ Pre-assembled for quick, hassle free installation.



OZHRHSLA07BK Snap Lock Assembly
22" strap fits post up to 7" OD
OZHRHSLA10BK Snap Lock Assembly
31" strap fits post up to 10" OD
OZHRHSLA1225BK Snap Lock Assembly
38" strap fits post up to 12.25" OD

OZHRHSS1230BK 1/2"x.030"x100'
OZHRHSS3430BK 3/4"x.030"x100'
Black Stainless Steel Strapping

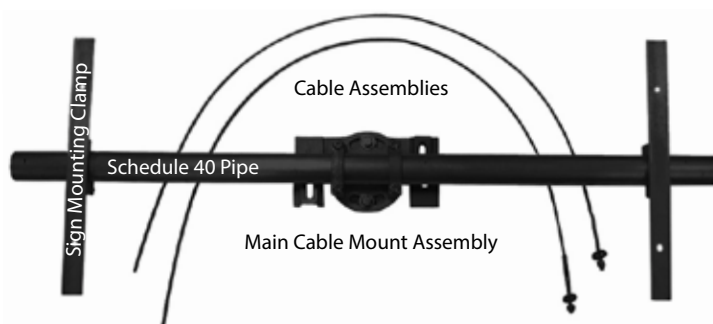

Metro "Mast-o-Bracket" Kit

HEAVY-DUTY


OSIZ840HMCWCM30096BK

Main Cable Mount Assembly (Kit includes 1) The main assembly is the bracket at the center of the Mast-O-Bracket system.

Cable Assembly (Kit includes 2) Length: 50" including threaded connector, 1.5" long 3/8"-16 TPI and 1.375" long 5/16" HEX. Nylon locking nut with washer provided. Free end of cable welded to prevent fraying.

Sign Mounting Clamp (Kit includes 4)
16" Sign Mounting Clamp for use with the Mast-o-Bracket.

Schedule 40 Pipe (Kit includes 1)
Pipe is 1.5" Diameter - No Slot, 72" long pipe for 85" - 96" sign



Attachment to Mast Arm Options:
Use Stainless Steel Cables with Hardware provided in kits. Other cable lengths available. All kits come unassembled. Call for quote.

Wayfinding & Entrance Signs

- ◆ Wayfinding and entrance signs can be designed to match other color schemes and shapes in the area.
- ◆ Entrance and wayfinding signs add a nice upscale appeal to the community.
- ◆ Wayfinding signs will direct visitors to sites more easily, creating safer roads and visitor satisfaction.
- ◆ Entrance signs are ideal for subdivisions, businesses, and schools.



Custom Products Corporation

P.O. Box 54091
Jackson, MS 39288-4091
www.cpcsigns.com

PRST STD
U.S. Postage
PAID
Custom Products
Corporation



CSNS CATALOG - CAT11

CUSTOM STREET NAME PACKAGES, SYSTEMS & COMPONENTS



Mail:

P.O. Box 54091
Jackson, MS 39288-4091

Shipping:

1120 Flowood Dr.
Jackson, MS 39232

EMAIL

sales@cpcsigns.com



HOURS OF OPERATION

7:30 am - 5:00 pm CST

Sales:

1-800-367-1492 (Voice)
1-601-932-5854 (Voice)
1-800-206-3444 (Fax)
1-601-932-7178 (Fax)

WEBSITE

www.cpcsigns.com